


COB

SERIES



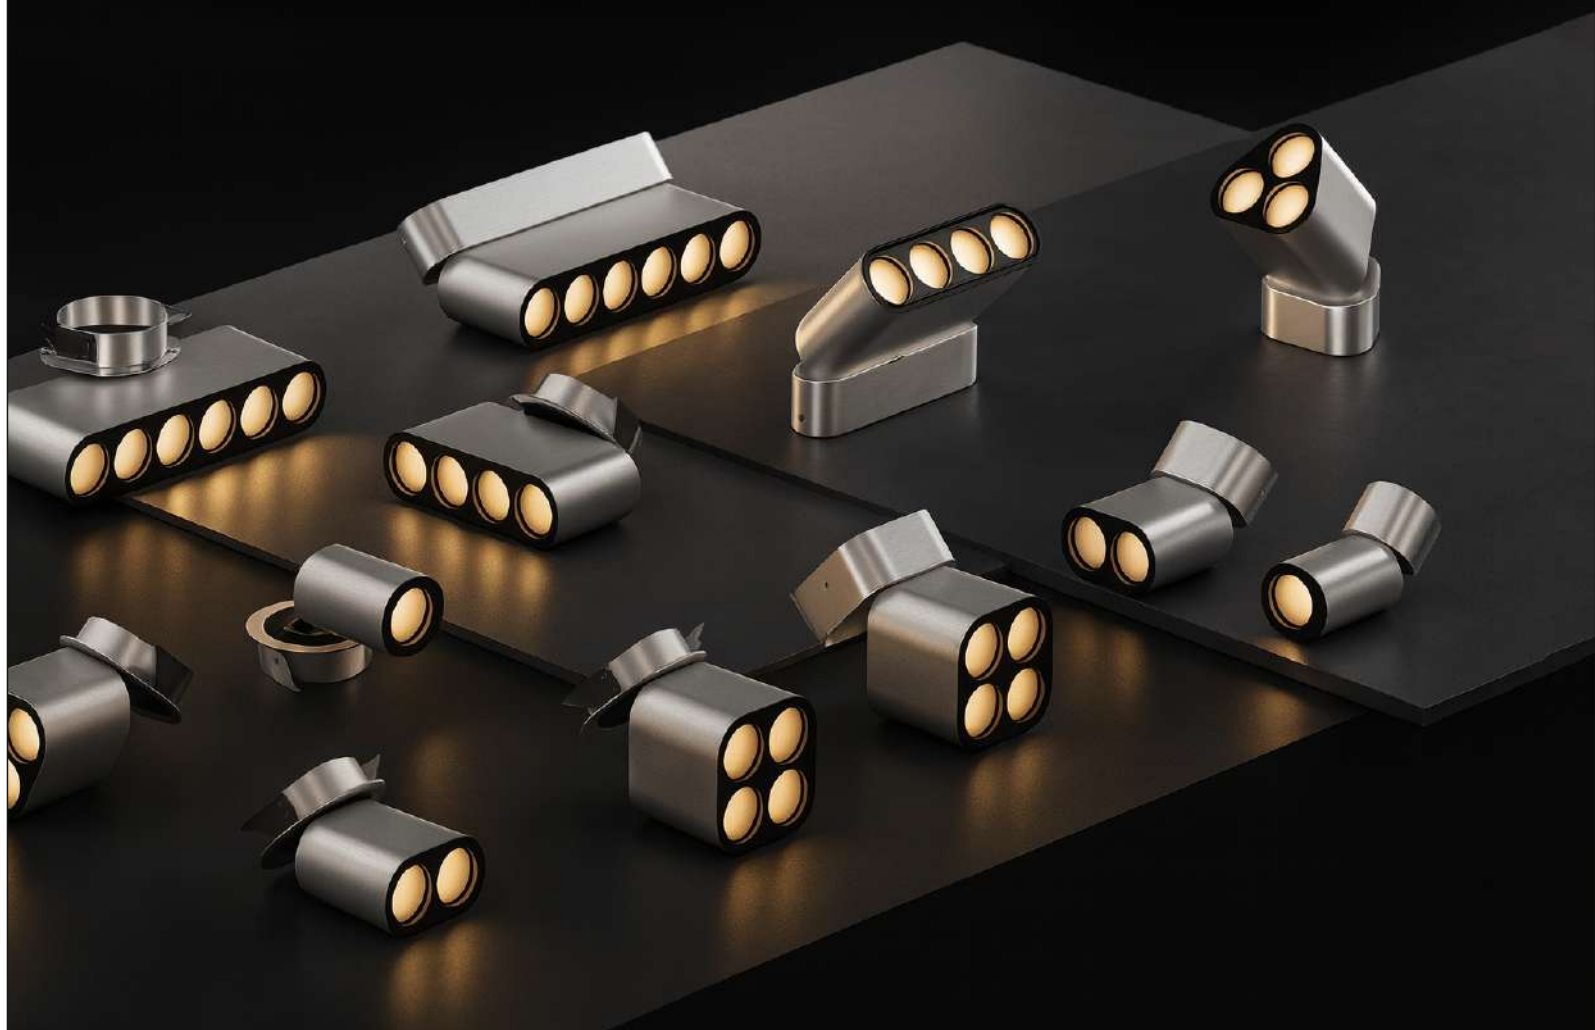


ROUND FRAME




ROUND TRIMLESS
FRAME



SQUARE FRAME

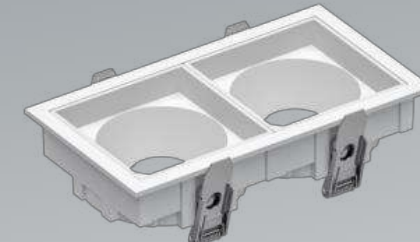

SQUARE DOUBLE HEAD
FRAME



SQUARE SINGLE HEAD
TRIMLESS FRAME



SQUARE DOUBLE HEAD
TRIMLESS FRAME

VIVID PRO SPOTLIGHT

Mini-Cutout
Powerful high Efficiency



VIVID PRO


The optical accessories for spotlights are diverse, ranging from Reflectors at different angles to various lenses. Each type of accessory brings a unique lighting effect. This diversity enables spotlights to adapt to various illumination needs, whether it's highlighting an artwork or creating a soft ambient atmosphere. By changing different optical accessories, spotlights can achieve different effects. The design philosophy lies in carefully selecting and combining these optical accessories to create lighting effects that not only fulfill functional requirements but also possess artistic sensibilities, making the space more personalized and layered.



VIVID PRO SPOTLIGHT


OPTICAL APPLICATIONS

Optional accessories are available to meet the needs of various lighting locations.
 TIR technology PC optical lens. The light output is even and there is no odd spots.
 optical honeycomb anti-glare net , linear filter, single asymmetric filter, double asymmetric filter.

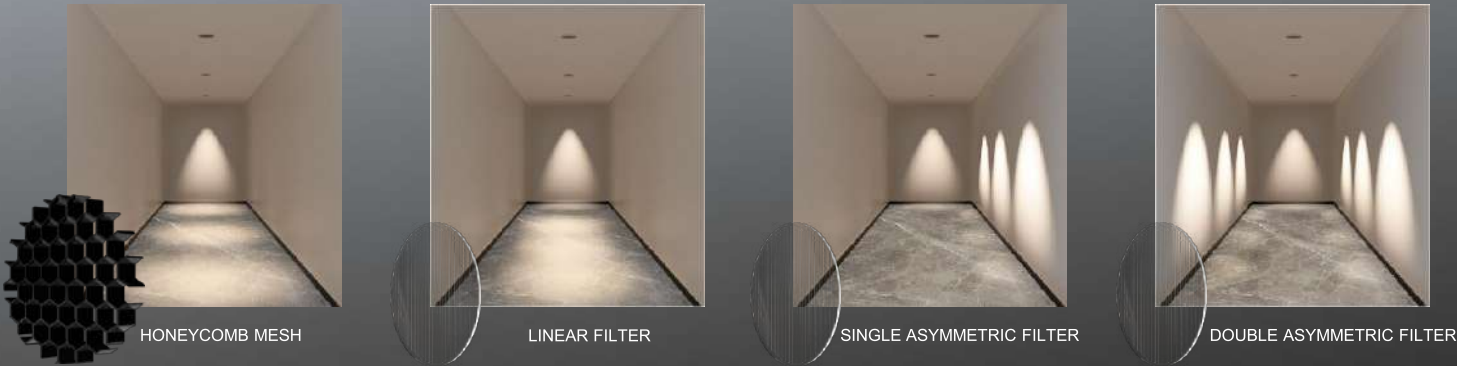

Diagram

Unit:MM

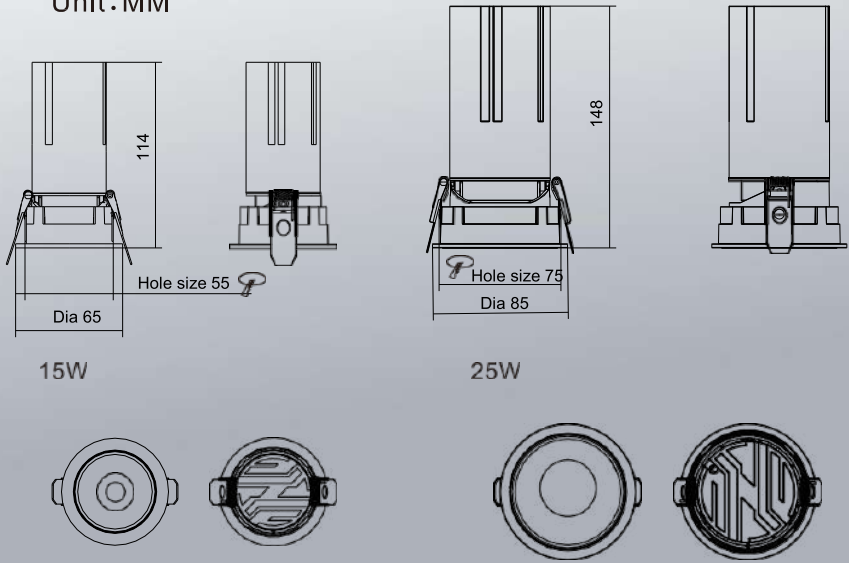

DETIALED VIEW

Heat sinker

COB Mount

PC Lens

Lamp body ring

Strong spring buckle

COB light source

Lens holder

Middle ring



Front frame

Gun black reflector
(Optional Rose-gold /Glossy Silvery /Foggy -silvery/Matt white /Matt black)



OPTICS

Tech. Support: Tell us the room length, width, height and the usage.
 We have an engineer team to respond the DIALUX simulations for
 lights quantity calculation and effects.
 les files are available upon request.

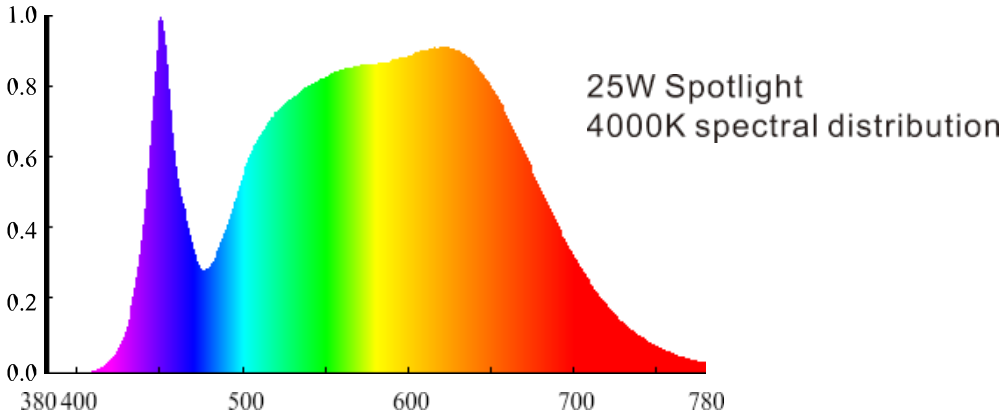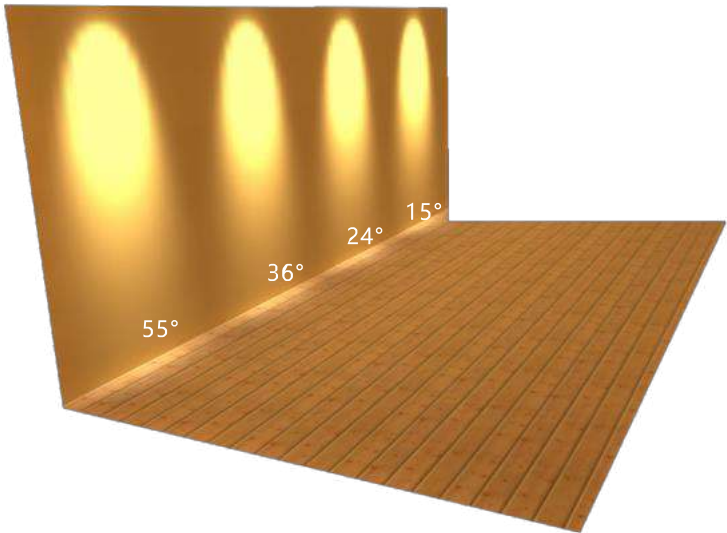

What are the benefits of acrossing optical design?




When designing the secondary optical structure of the lamp, the reflected and collimated light paths in the TIR lens are converged outside the lamp reflector, and the light energy is reflected as little as possible on the inner reflector wall. In this way, when the lamp is installed on the ceiling, a black light effect of seeing light but not seeing the lamp' can be formed. Since the light is almost not reflected on the inner reflector wall, the lamp has an excellent anti-glare effect.

ANTI-GLARE DESIGN

The LED light source is hidden deep, and the light cannot be seen when you see the light. The optical design of the deep tube increases the distance between the light source and the light-emitting port. Effectively absorbs glares, making the light soft and not hurting the eyes..

What is glare?

The normal line of sight of the human eye is from 30 above to 60" below.
 The dazzling light that appears within this range is glare.
 tips
 Only lamps with a cut-off angle greater than 60" have anti-glare function.

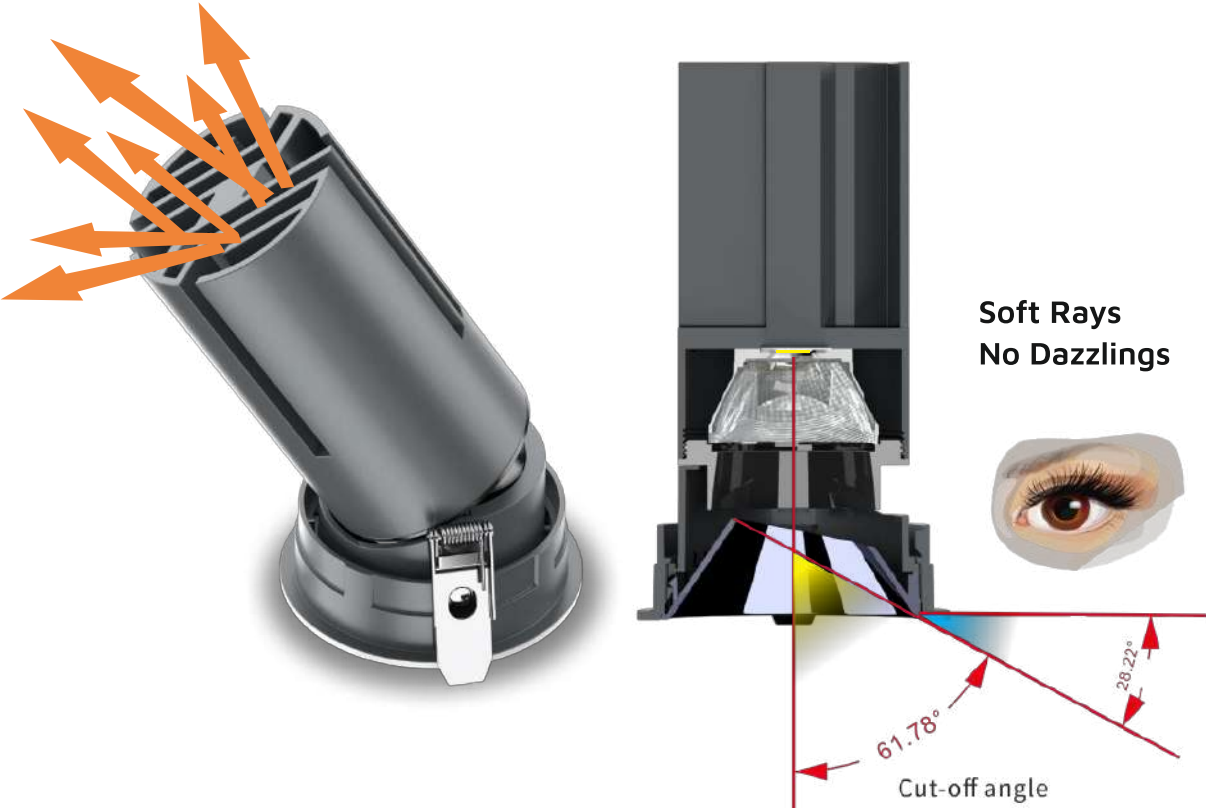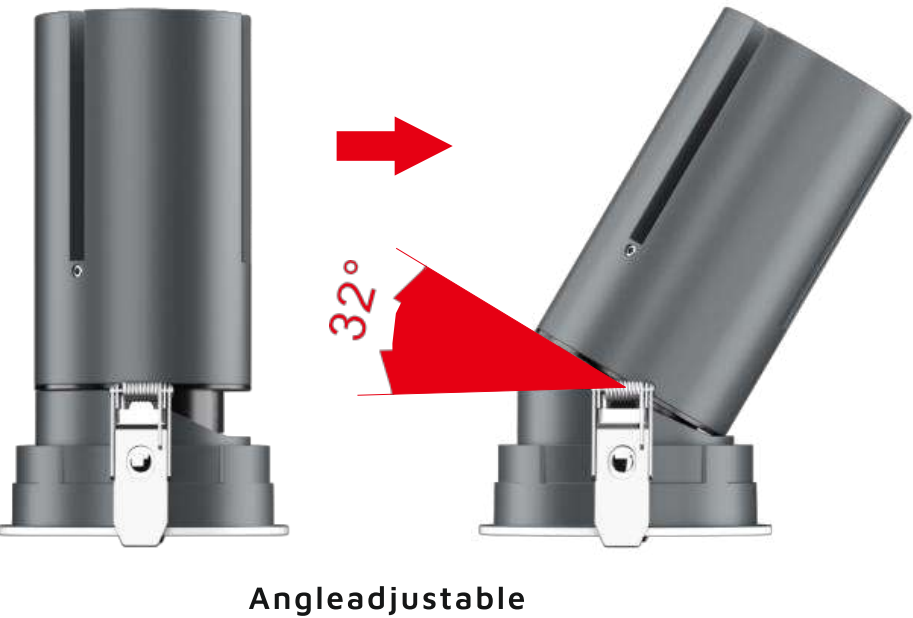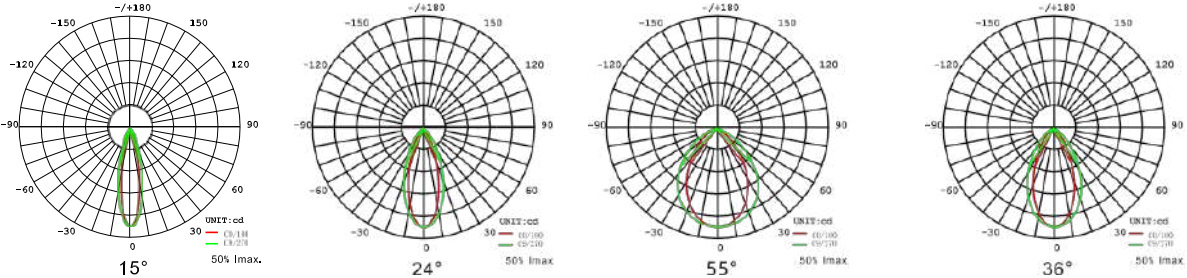



Modern Glow Design

Illuminate spaces with sleek and contemporary COB lighting.

VIVID PRO



PRODUCT DETAILS

Model No.	Wattage	Dimensions (in mm)	Cutout (in mm)
VL-LXCB-001-7W	7-15W	65X114	55
VL-LXCB-001-7W	18-25W	85X147	75

FEATURES:-

Led : **CREE** LED **bridgelux**

Body Color : Wh/bk

Warranty: 3/5 Year

Thd : < Than 10%

Output Ripple Current : < 5%

Power Factor : > 0.95

Sustains At 300vac For 48 Hrs. & 440vac For 2 Hrs.

Over Temperature Protection - Thermal Fold Back

Input Ovp & Uvp Protection

O/p Open & Short Circuit Protection

O/p Overload & O/p To Ground Short Circuit Protection.


Life 50,000hrs At Max Tc.

OTHER VERSIONS:



Beam Angle :
15°/24°/36°/55°

COLOR OPTIONS:



VIVID PRO TRIMLESS



PRODUCT DETAILS

Model No.	Wattage	Dimensions (in mm)	Cutout (in mm)
VL-LXCB-002-7W	7-15	88X114	55
VL-LXCB-002-7W	18-25	108X147	75

FEATURES:-

Led : **CREE** LED **bridgelux**

Body Color : Wh/bk

Warranty: 3/5 Year

Thd : < Than 10%

Output Ripple Current : < 5%

Power : Factor > 0.95

Sustains At 300vac For 48 Hrs. & 440vac For 2 Hrs.

Over Temperature Protection - Thermal Fold Back

Input Ovp & Uvp Protection

O/p Open & Short Circuit Protection

O/p Overload & O/p To Ground Short Circuit Protection.


Life 50,000hrs At Max Tc.

OTHER VERSIONS:



Beam Angle :
15°/24°/36°/55°

COLOR OPTIONS:





Smart Light Innovation

Bring life, depth, and clarity to every space.

VIVID PRO SQARE



PRODUCT DETAILS

Model No.	Wattage	Dimensions (in mm)	Cutout (in mm)
VL-LXCB-003-7W	7-15W	65X65X121	58X55
VL-LXCB-003-7W	18-25W	85X85X158	78X75

FEATURES:-

Led :  

Body Color : Wh/bk

Warranty: 3/5 Year

Thd : < Than 10%

Output Ripple Current : < 5%

Power : Factor > 0.95

Sustains At 300vac For 48 Hrs. & 440vac For 2 Hrs.

Over Temperature Protection - Thermal Fold Back

Input Ovp & Uvp Protection

O/p Open & Short Circuit Protection

O/p Overload & O/p To Ground Short Circuit Protection.


Life 50,000hrs At Max Tc.

OTHER VERSIONS:



Beam Angle :
15°/24°/36°/55°

COLOR OPTIONS:



VIVID PRO SQARE DOUBLE



PRODUCT DETAILS

Model No.	Wattage	Dimensions (in mm)	Cutout (in mm)
VL-LXCB-004-7W	7*7-15*15	115X65X121	105X58
VL-LXCB-004-7W	18*18-25*25	155X85X158	145X78

FEATURES:-

Led :  

Body Color : Wh/bk

Warranty: 3/5 Year

Thd : < Than 10%

Output Ripple Current : < 5%

Power : Factor > 0.95

Sustains At 300vac For 48 Hrs. & 440vac For 2 Hrs.

Over Temperature Protection - Thermal Fold Back

Input Ovp & Uvp Protection

O/p Open & Short Circuit Protection

O/p Overload & O/p To Ground Short Circuit Protection.


Life 50,000hrs At Max Tc.


OTHER VERSIONS:



Beam Angle :
15°/24°/36°/55°

COLOR OPTIONS:



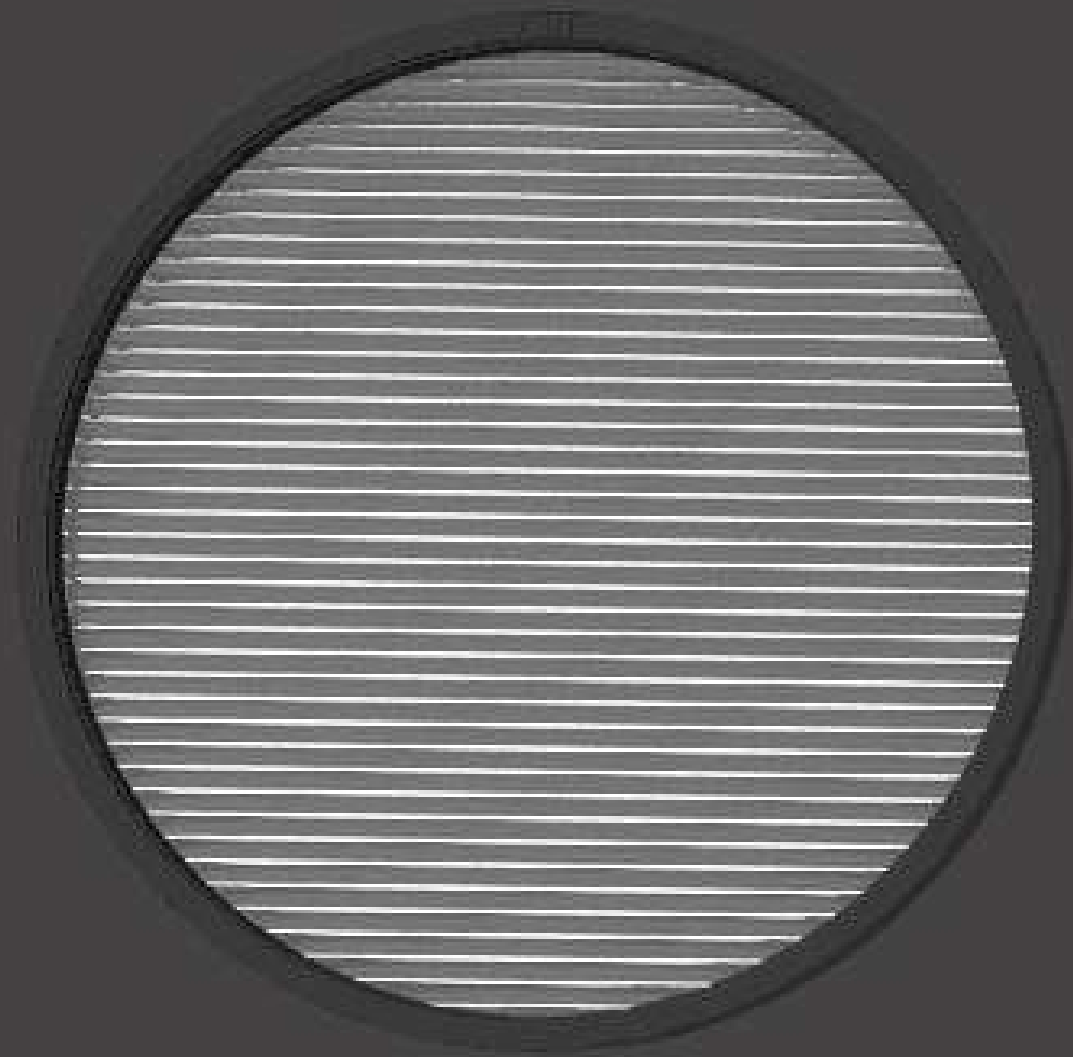

- **Linear Filter**
- **Single Asymmetric**
- **Double Asymmetric**

VIVID MAX

Advanced Technology
For Perfect Illumination.

3mm thickness,
same with honey comb



FILTER
APPLICATION



VIVID

Special Filters

Different Angle

Different Filter

Different Effect

Direct Lens	Single asymmetric	Double asymmetric	Linear filter
15° 			
24° 			
36° 			



Vivid Max Illumination

Where cutting-edge technology meets stunning illumination.

VIVID MAX-RD



PRODUCT DETAILS

Model No.	Wattage	Dimensions (in mm)	Cutout (in mm)
VL-LXCB-005-7W	6-8W	65x78	55
VL-LXCB-005-7W	10-15W	85X101	75
VL-LXCB-005-12W	18-20W	105X110	95
	25-30W	105X121	95
	32-40W	135X142	120

FEATURES:-

Led :

Body Color : Wh/bk

Warranty: 3/5 Year

Thd : < Than 10%

Output Ripple Current : < 5%

Power : Factor > 0.95

Sustains At 300vac For 48 Hrs. & 440vac For 2 Hrs.

Over Temperature Protection - Thermal Fold Back

Input Ovp & Uvp Protection

O/p Open & Short Circuit Protection

O/p Overload & O/p To Ground Short Circuit Protection.


Life 50,000hrs At Max Tc.

OTHER VERSIONS:



Beam Angle :
15°/24°/36°/55°

COLOR OPTIONS:



VIVID MAX-RDT



PRODUCT DETAILS

Model No.	Wattage	Dimensions (in mm)	Cutout (in mm)
VL-LXCB-006-7W	5-8W	88X78	55
VL-LXCB-006-7W	12-15W	108X101	75
VL-LXCB-006-12W	15-20W	128X110	95
	25-30W	128X121	95

FEATURES:-

Led :

Body Color : Wh/bk

Warranty: 3/5 Year

Thd : < Than 10%

Output Ripple Current : < 5%

Power : Factor > 0.95

Sustains At 300vac For 48 Hrs. & 440vac For 2 Hrs.

Over Temperature Protection - Thermal Fold Back


Input Ovp & Uvp Protection

O/p Open & Short Circuit Protection

O/p Overload & O/p To Ground Short Circuit Protection.


Life 50,000hrs At Max Tc.

OTHER VERSIONS:



Beam Angle :
15°/24°/36°/55°

COLOR OPTIONS:





Infinity Of Light

Timeless designs with endless brightness.

VIVID MAX SQ



PRODUCT DETAILS

Model No.	Wattage	Dimensions (in mm)	Cutout (in mm)
VL-LXCB-007-7W	6-8W	65x65x85	55x55
VL-LXCB-007-7W	12-15W	85X85x111	75x75
VL-LXCB-007-12W	18-20W	105X105x124	95x95
VL-LXCB-007-12W	25-30W	105x105x135	95x95

FEATURES:-

Led : **CREE** LED **bridgelux**

Body Color : Wh/bk

Warranty: 3/5 Year

Thd : < Than 10%

Output Ripple Current : < 5%

Power : Factor > 0.95

Sustains At 300vac For 48 Hrs. & 440vac For 2 Hrs.

Over Temperature Protection - Thermal Fold Back


Input Ovp & Uvp Protection

O/p Open & Short Circuit Protection


O/p Overload & O/p To Ground Short Circuit Protection.

Life 50,000hrs At Max Tc.

OTHER VERSIONS:



COLOR OPTIONS:



VIVID MAX SQT



PRODUCT DETAILS

Model No.	Wattage	Dimensions (in mm)	Cutout (in mm)
VL-LXCB-008-7W	6-8W	65x65x85	58x55
VL-LXCB-008-7W	12-15W	85X85x111	78x75
VL-LXCB-008-12W	18-20W	105X105x124	98X95
VL-LXCB-008-12W	25-30W	95X95x125	98X95

FEATURES:-

Led : **CREE** LED **bridgelux**

Body Color : Wh/bk

Warranty: 3/5 Year

Thd : < Than 10%

Output Ripple Current : < 5%

Power : Factor > 0.95

Sustains At 300vac For 48 Hrs. & 440vac For 2 Hrs.

Over Temperature Protection - Thermal Fold Back

Input Ovp & Uvp Protection

O/p Open & Short Circuit Protection


O/p Overload & O/p To Ground Short Circuit Protection.

Life 50,000hrs At Max Tc.

OTHER VERSIONS:



COLOR OPTIONS:





Spectrum Of Shine

Vibrant COB lighting for modern interiors.

VIVID MAX SQ DUO



PRODUCT DETAILS

Model No.	Wattage	Dimensions (in mm)	Cutout (in mm)
VL-LXCB-009-7X2W	7X2W	115X65X85	105X55
VL-LXCB-009-12X2W	12X2W	155X85X111	145X75
VL-LXCB-009-18X2W	18X2W	195X105X124	185X95
VL-LXCB-009-25X2W	25X2W	195X105X135	185X95

FEATURES:-

- Led :
- Body Color : Wh/bk
- Warranty: 3/5 Year
- Thd : < Than 10%
- Output Ripple Current : < 5%
- Power : Factor > 0.95
- Sustains At 300vac For 48 Hrs. & 440vac For 2 Hrs.
- Over Temperature Protection - Thermal Fold Back
- Input Ovp & Uvp Protection
- O/p Open & Short Circuit Protection
- O/p Overload & O/p To Ground Short Circuit Protection.
- Life 50,000hrs At Max Tc.

VIVID MAX SQT DUO



PRODUCT DETAILS

Model No.	Wattage	Dimensions (in mm)	Cutout (in mm)
VL-LXCB-010-7X2W	7X2W	115X65X85	105X85
VL-LXCB-010-12X2W	12X2W	155X85X111	145X78
VL-LXCB-010-18X2W	18X2W	195X105X124	185X98
VL-LXCB-010-25X2W	25X2W	195X105X135	185X98


FEATURES:-

- Led :
- Body Color : Wh/bk
- Warranty: 3/5 Year
- Thd : < Than 10%
- Output Ripple Current : < 5%
- Power : Factor > 0.95
- Sustains At 300vac For 48 Hrs. & 440vac For 2 Hrs.
- Over Temperature Protection - Thermal Fold Back
- Input Ovp & Uvp Protection
- O/p Open & Short Circuit Protection
- O/p Overload & O/p To Ground Short Circuit Protection.
- Life 50,000hrs At Max Tc.

OTHER VERSIONS:




Beam Angle :
36°/50°/60°/70°




OTHER VERSIONS:



Beam Angle :
36°/50°/60°/70°



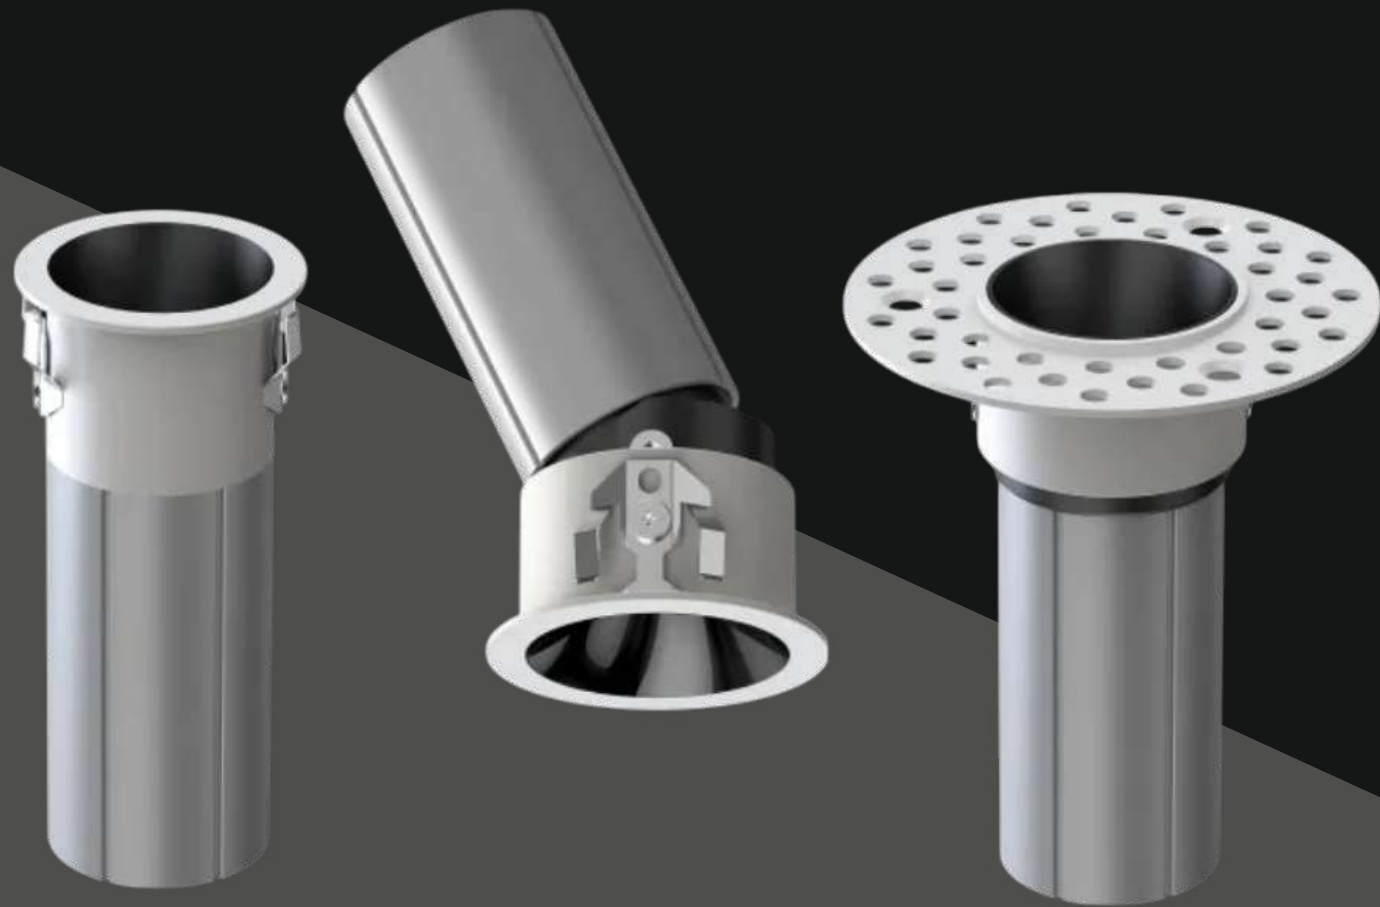

Brilliance Beyond Limits

Powerful performance packed in compact design.

TINY



PRODUCT DETAILS

Model No.	Wattage	Dimensions (in mm)	Cutout (in mm)
VL-LXCB-011-3W	3W	30X60	25
VL-LXCB-011-6W	6W	40X80	35
VL-LXCB-011-10W	10W	50X100	45

FEATURES:-

Led : **CREE** LED **bridgelux**

Body Color : Wh/bk

Warranty: 3/5 Year

Thd : < Than 10%

Output Ripple Current : < 5%

Power : Factor > 0.95

Sustains At 300vac For 48 Hrs. & 440vac For 2 Hrs.

Over Temperature Protection - Thermal Fold Back

Input Ovp & Uvp Protection

O/p Open & Short Circuit Protection

O/p Overload & O/p To Ground Short Circuit Protection.


Life 50,000hrs At Max Tc.

OTHER VERSIONS:



Beam Angle :
36°/50°/60°/70°

COLOR OPTIONS:



www.virtuallights.in

TINY TRIMLESS



PRODUCT DETAILS

Model No.	Wattage	Dimensions (in mm)	Cutout (in mm)
VL-LXCB-012-3W	3W	53X60	25
VL-LXCB-012-6W	6W	65X80	35
VL-LXCB-012-10W	10W	79X100	45

FEATURES:-

Led : **CREE** LED **bridgelux**

Body Color : Wh/bk

Warranty: 3/5 Year

Thd : < Than 10%

Output Ripple Current : < 5%

Power : Factor > 0.95

Sustains At 300vac For 48 Hrs. & 440vac For 2 Hrs.

Over Temperature Protection - Thermal Fold Back

Input Ovp & Uvp Protection

O/p Open & Short Circuit Protection

O/p Overload & O/p To Ground Short Circuit Protection.


Life 50,000hrs At Max Tc.

OTHER VERSIONS:



Beam Angle :
24°/38°

COLOR OPTIONS:



www.virtuallights.in

24° anti-glare light Angle

Deep Anti-glare Scientific Lighting

Powerful illumination born from compact precision.



Shielding Angle > 60°

Anti-glare Angle = 24°

TRITON**PRODUCT DETAILS**

Model No.	Wattage	Dimensions (in mm)	Cutout (in mm)
VL-LXCB-013-9W	9W	58X98	50
VL-LXCB-013-14W	14W	58X116	50
VL-LXCB-013-18W	18W	58X133	50

**FEATURES:-**Led :  

Body Color : Wh/bk

Warranty: 3/5 Year

Thd : < Than 10%

Output Ripple Current : < 5%

Power : Factor > 0.95

Sustains At 300vac For 48 Hrs. & 440vac For 2 Hrs.

Over Temperature Protection - Thermal Fold Back


Input Ovp & Uvp Protection


O/p Open & Short Circuit Protection

O/p Overload & O/p To Ground Short Circuit Protection.

Life 50,000hrs At Max Tc.

OTHER VERSIONS:

 Beam Angle :
 24°/38°
COLOR OPTIONS:

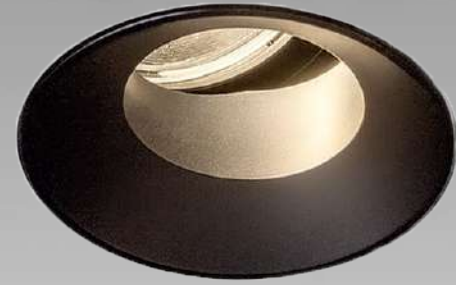

Glow With Style

Make every room a masterpiece of light.

ROBUST



PRODUCT DETAILS

Model No.	Wattage	Dimensions (in mm)	Cutout (in mm)
VL-LXCB-014-12W	12W	65x45x90	40

FEATURES:-

Led : **CREE** LED **bridgelux**

Body Color : Wh/bk

Warranty: 3/5 Year

Thd : < Than 10%

Output Ripple Current : < 5%

Power : Factor > 0.95

Sustains At 300vac For 48 Hrs. & 440vac For 2 Hrs.

Over Temperature Protection - Thermal Fold Back

Input Ovp & Uvp Protection

O/p Open & Short Circuit Protection


O/p Overload & O/p To Ground Short Circuit Protection.

Life 50,000hrs At Max Tc.

OTHER VERSIONS:



COLOR OPTIONS:



ROBUST-T



PRODUCT DETAILS

Model No.	Wattage	Dimensions (in mm)	Cutout (in mm)
VL-LXCB-015-12W	12W	65x45x90	45

FEATURES:-

Led : **CREE** LED **bridgelux**

Body Color : Wh/bk

Warranty: 3/5 Year

Thd : < Than 10%

Output Ripple Current : < 5%

Power : Factor > 0.95

Sustains At 300vac For 48 Hrs. & 440vac For 2 Hrs.

Over Temperature Protection - Thermal Fold Back

Input Ovp & Uvp Protection

O/p Open & Short Circuit Protection


O/p Overload & O/p To Ground Short Circuit Protection.

Life 50,000hrs At Max Tc.

OTHER VERSIONS:



COLOR OPTIONS:



Illumination Redefined

Lighting that elevates your ambience instantly.

BULLET



PRODUCT DETAILS

Model No.	Wattage	Dimensions (in mm)	Cutout (in mm)
VL-LXCB-016-10W	10W	35X100	31

FEATURES:-

Led : **CREE** LED **bridgelux**

Body Color : Wh/bk

Warranty: 3/5 Year

Thd : < Than 10%

Output Ripple Current : < 5%

Power : Factor > 0.95

Sustains At 300vac For 48 Hrs. & 440vac For 2 Hrs.

Over Temperature Protection - Thermal Fold Back

Input Ovp & Uvp Protection

O/p Open & Short Circuit Protection


O/p Overload & O/p To Ground Short Circuit Protection.

Life 50,000hrs At Max Tc.

OTHER VERSIONS:



COLOR OPTIONS:



SHEEN



PRODUCT DETAILS

Model No.	Wattage	Dimensions (in mm)	Cutout (in mm)
VL-LXCB-017-12W	12W	55X98	45

FEATURES:-

Led : **CREE** LED **bridgelux**

Body Color : Wh/bk

Warranty: 3/5 Year

Thd : < Than 10%

Output Ripple Current : < 5%

Power : Factor > 0.95

Sustains At 300vac For 48 Hrs. & 440vac For 2 Hrs.

Over Temperature Protection - Thermal Fold Back

Input Ovp & Uvp Protection

O/p Open & Short Circuit Protection


O/p Overload & O/p To Ground Short Circuit Protection.

Life 50,000hrs At Max Tc.

OTHER VERSIONS:



COLOR OPTIONS:




Beam Of Luxury

Premium lighting that defines sophistication.



Rhythm Of Radiance

Elegant lighting that enhances every detail.

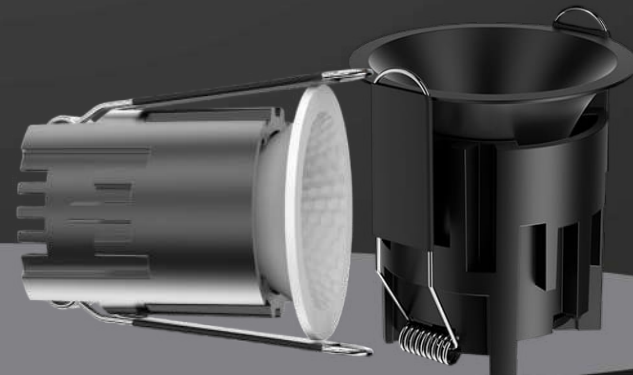

ONYX



PRODUCT DETAILS

Model No.	Wattage	Dimensions (in mm)	Cutout (in mm)
VL-LXCB-018-12W	12W	62X108	55
VL-LXCB-018-18W	18W	63X128	55
VL-LXCB-018-25W	25W	83X110	75

FEATURES:-

Led : **CREE LED**

Body Color : Wh/bk

Warranty: 3/5 Year

Thd : < Than 10%

Output Ripple Current : < 5%

Power : Factor > 0.95

Sustains At 300vac For 48 Hrs. & 440vac For 2 Hrs.

Over Temperature Protection - Thermal Fold Back


Input Ovp & Uvp Protection

O/p Open & Short Circuit Protection


O/p Overload & O/p To Ground Short Circuit Protection.

Life 50,000hrs At Max Tc.

OTHER VERSIONS:



COLOR OPTIONS:



ATHER



PRODUCT DETAILS

Model No.	Wattage	Dimensions (in mm)	Cutout (in mm)
VL-LXCB-019-7W	7W	53X61	45
VL-LXCB-019-12W	12W	63X71	55
VL-LXCB-019-15W	15W	73X78	65
VL-LXCB-019-18W	18W	83X83	75

FEATURES:-

Led : **CREE LED**

Body Color : Wh/bk

Warranty: 3/5 Year

Thd : < Than 10%

Output Ripple Current : < 5%

Power : Factor > 0.95

Sustains At 300vac For 48 Hrs. & 440vac For 2 Hrs.

Over Temperature Protection - Thermal Fold Back


Input Ovp & Uvp Protection

O/p Open & Short Circuit Protection


O/p Overload & O/p To Ground Short Circuit Protection.

Life 50,000hrs At Max Tc.

OTHER VERSIONS:




COLOR OPTIONS:



IP65 WATERPROOFING

Ip65 PHANTOM

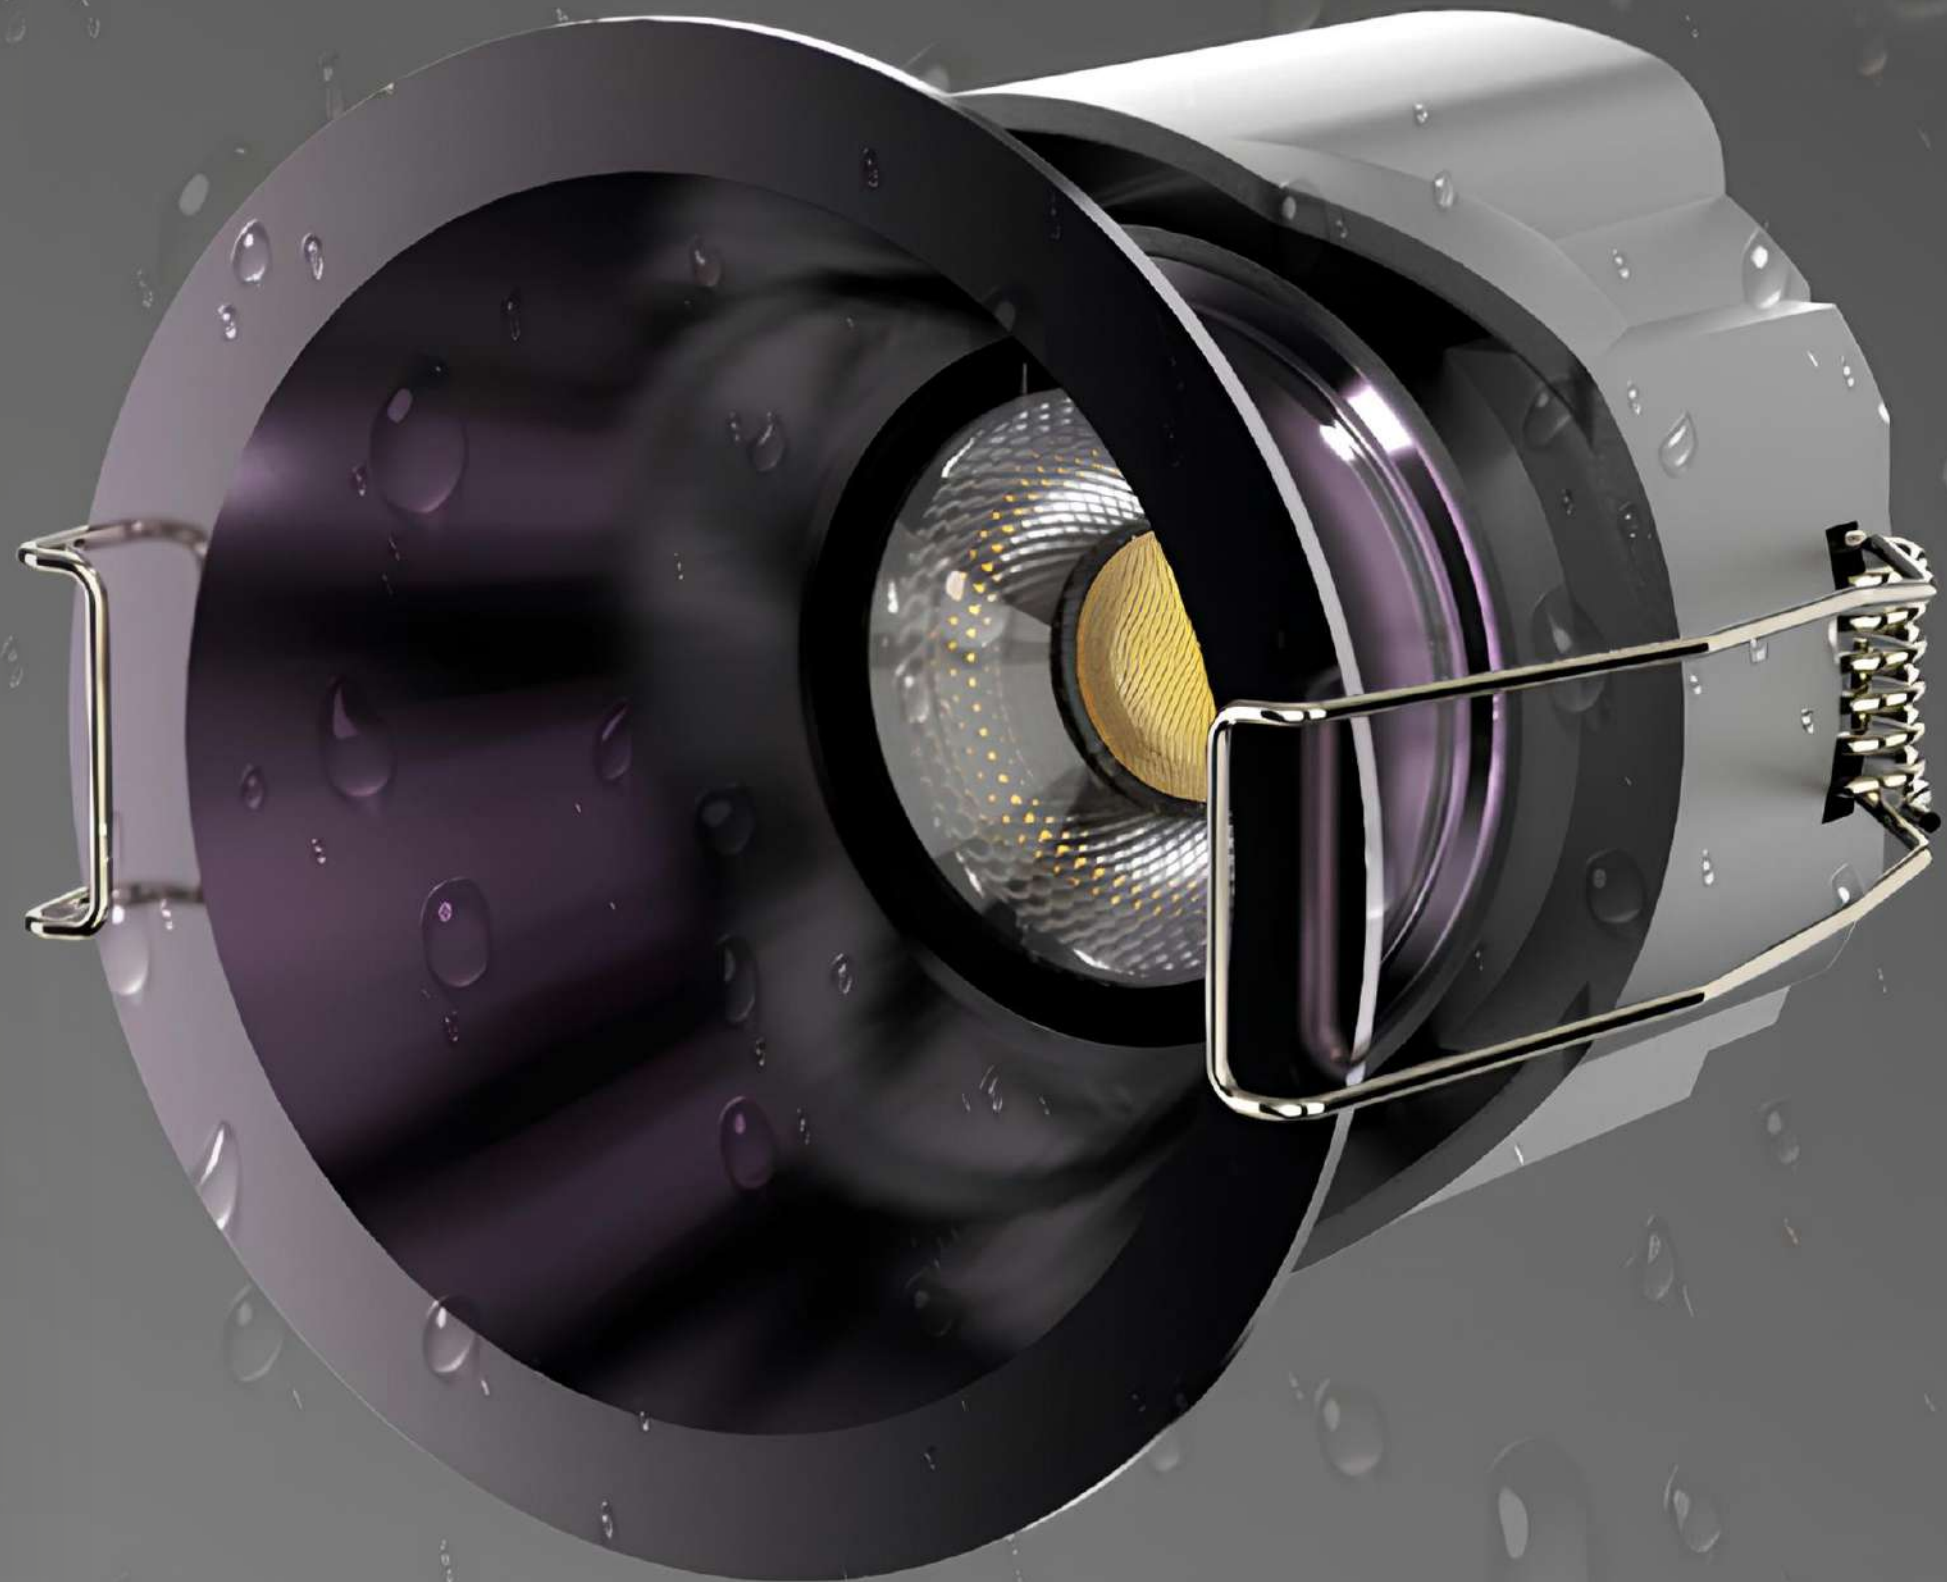

**TWO STUNNING SHAPE
DEEP / CURVE**

Experience the perfect blend of premium quality and contemporary design with our exquisite COB lights.

**Illuminate.
Inspire.
Elevate.**



PHANTOM IP65 CURVE



PRODUCT DETAILS

Model No.	Wattage	Dimensions (in mm)	Cutout (in mm)
VL-LXCB-020-7W	3-7W	65x52	55
VL-LXCB-020-7W	10-12W	85X56	75
VL-LXCB-020-12W	15-18W	105X68	95

FEATURES:-

Led : CREE LED  

Body Color : Wh/bk

Warranty: 3/5 Year

Thd : < Than 10%

Output Ripple Current : < 5%

Power : Factor > 0.95

Sustains At 300vac For 48 Hrs. & 440vac For 2 Hrs.

Over Temperature Protection - Thermal Fold Back

Input Ovp & Uvp Protection

O/p Open & Short Circuit Protection

O/p Overload & O/p To Ground Short Circuit Protection.


Life 50,000hrs At Max Tc.

OTHER VERSIONS:



Beam Angle :
36°/50°/60°/70°

COLOR OPTIONS:



PHANTOM IP65 DEEP



PRODUCT DETAILS

Model No.	Wattage	Dimensions (in mm)	Cutout (in mm)
VL-LXCB-021-7W	3-7W	65x72	55
VL-LXCB-021-12W	10-12W	85X79	75
VL-LXCB-021-18W	15-18W	105X94	95

FEATURES:-

Led : CREE LED  

Body Color : Wh/bk

Warranty: 3/5 Year

Thd : < Than 10%

Output Ripple Current : < 5%

Power : Factor > 0.95

Sustains At 300vac For 48 Hrs. & 440vac For 2 Hrs.

Over Temperature Protection - Thermal Fold Back

Input Ovp & Uvp Protection

O/p Open & Short Circuit Protection

O/p Overload & O/p To Ground Short Circuit Protection.


Life 50,000hrs At Max Tc.

OTHER VERSIONS:



Beam Angle :
36°/50°/60°/70°

COLOR OPTIONS:





Color optional

Chrome Black/ Matte White/
Matte Black Bright Silver

Angle adjustable

Our adjustable spotlights offer the flexibility to customize your lighting experience



long-life




radiate quickly



Thickened cold forged aluminum radiator

30

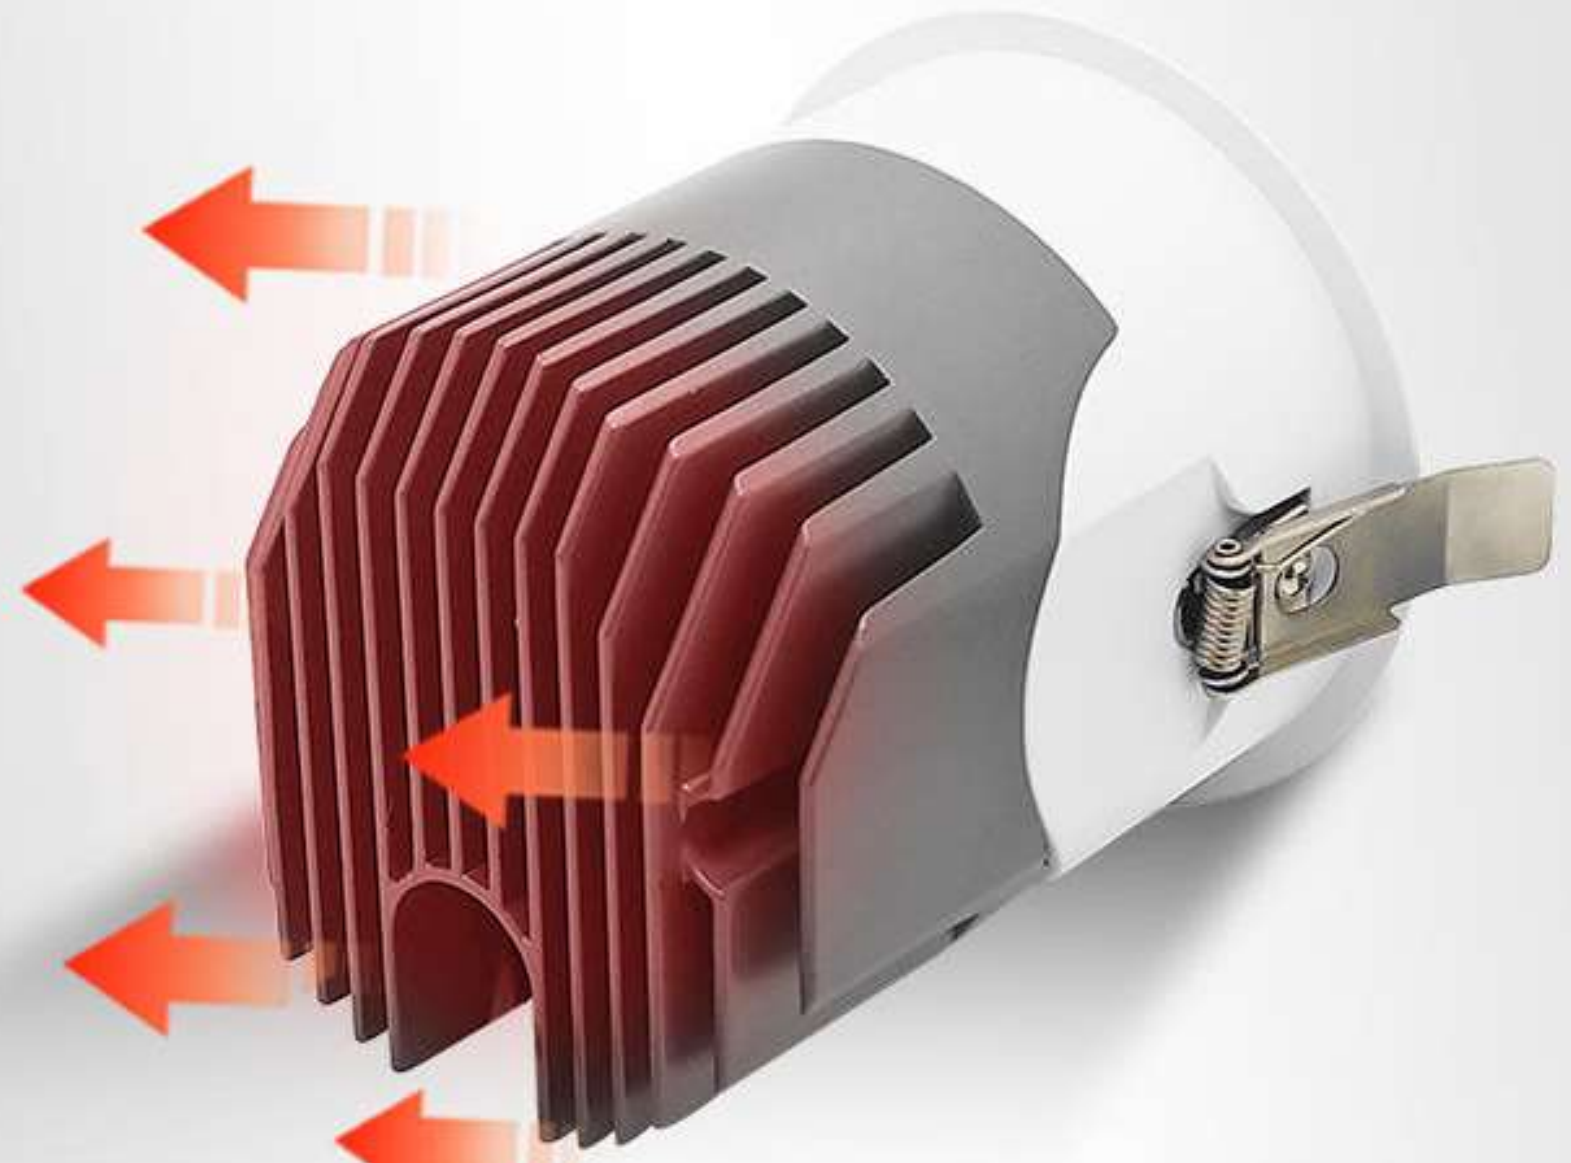



Pure Light Precision

Experience perfect focus and brilliance in every beam.

RAINBOW



PRODUCT DETAILS

Model No.	Wattage	Dimensions (in mm)	Cutout (in mm)
VL-LXCB-022-5W	5W	40X85	35
VL-LXCB-022-7W	7W	52X72	45
VL-LXCB-022-8W	8W	62X77	55
VL-LXCB-022-10W	10W	73X80	65
VL-LXCB-022-12W	12W	84X85	75
VL-LXCB-022-25W	25W	103X110	95
VL-LXCB-022-35W	35W	120X135	120

FEATURES:-

- Led : CREE LED, bridgelux.
- Body Color : Wh/ bk/ Customized
- Warranty: 3/5 Year
- Thd : <10%
- Output Ripple Current : < 5%
- Power Factor: > 0.95
- Sustains At 300vac For 48 Hrs. & 440vac For 2 Hrs.
- Over Temperature Protection - Thermal Fold Back
- Input Ovp & Uvp Protection
- O/p Open & Short Circuit Protection
- O/p Overload & O/p To Ground Short Circuit Protection.
- Life 50,000hrs At Max Tc.

MATRIX



PRODUCT DETAILS

Model No.	Wattage	Dimensions (in mm)	Cutout (in mm)
VL-LXCB-023-9W	9W	58X98	50
VL-LXCB-023-14W	14W	58X116	50
VL-LXCB-023-18W	18W	58X133	50


FEATURES:-

- Led : CREE LED, bridgelux.
- Body Color : Wh/bk
- Warranty: 3/5 Year
- Thd : < Than 10%
- Output Ripple Current : < 5%
- Power : Factor > 0.95
- Sustains At 300vac For 48 Hrs. & 440vac For 2 Hrs.
- Over Temperature Protection - Thermal Fold Back
- Input Ovp & Uvp Protection
- O/p Open & Short Circuit Protection
- O/p Overload & O/p To Ground Short Circuit Protection.
- Life 50,000hrs At Max Tc.


OTHER VERSIONS:




COLOR OPTIONS:



OTHER VERSIONS:



COLOR OPTIONS:



Ninja Series

Smooth And Consistent
Illumination Everywhere.





Symphony Of Shine

Perfect rhythm of light and shadow.

NINJA


PRODUCT DETAILS

Model No.	Wattage	Dimensions (in mm)	Cutout (in mm)
VL-LXCB-024-7W	07W	83X40	35
VL-LXCB-024-12W	12W	90X60	55

FEATURES:-

- Led : **CREE LED**  
- Body Color : Wh/bk
- Warranty: 3/5 Year
- Thd : < Than 10%
- Output Ripple Current : < 5%
- Power : Factor > 0.95
- Sustains At 300vac For 48 Hrs. & 440vac For 2 Hrs.
- Over Temperature Protection - Thermal Fold Back
- Input Ovp & Uvp Protection
- O/p Open & Short Circuit Protection
- O/p Overload & O/p To Ground Short Circuit Protection.
- Life 50,000hrs At Max Tc.

OTHER VERSIONS:



NINJA-T


PRODUCT DETAILS

Model No.	Wattage	Dimensions (in mm)	Cutout (in mm)
VL-LXCB-025-7W			
VL-LXCB-025-7W			
VL-LXCB-025-12W			

FEATURES:-

- Led : **CREE LED**  
- Body Color : Wh/bk
- Warranty: 3/5 Year
- Thd : < Than 10%
- Output Ripple Current : < 5%
- Power : Factor > 0.95
- Sustains At 300vac For 48 Hrs. & 440vac For 2 Hrs.
- Over Temperature Protection - Thermal Fold Back
- Input Ovp & Uvp Protection
- O/p Open & Short Circuit Protection
- O/p Overload & O/p To Ground Short Circuit Protection.
- Life 50,000hrs At Max Tc.

OTHER VERSIONS:





TRIX SPOTLIGHT

3W – 30W


**Convenient Adjustment
Function**

Can be rotated to various angles



TRIX SPOTLIGHT

Definition of pinball Achievement focus

Metal Pinball, When Swinging Angle, The Pinball
 Moves Up And Down With The Gear Rolling When
 Popping Up To The Serrated Concave Point,fasten
 The Radiator To Prevent Looseness

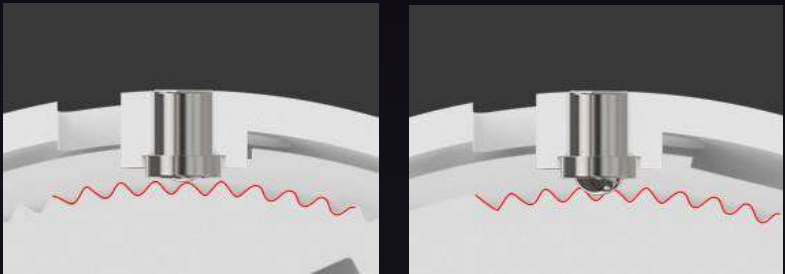

Up and Down Movement of the ball

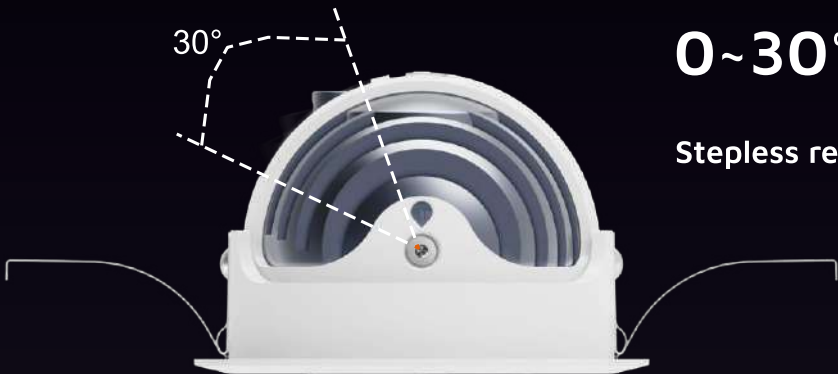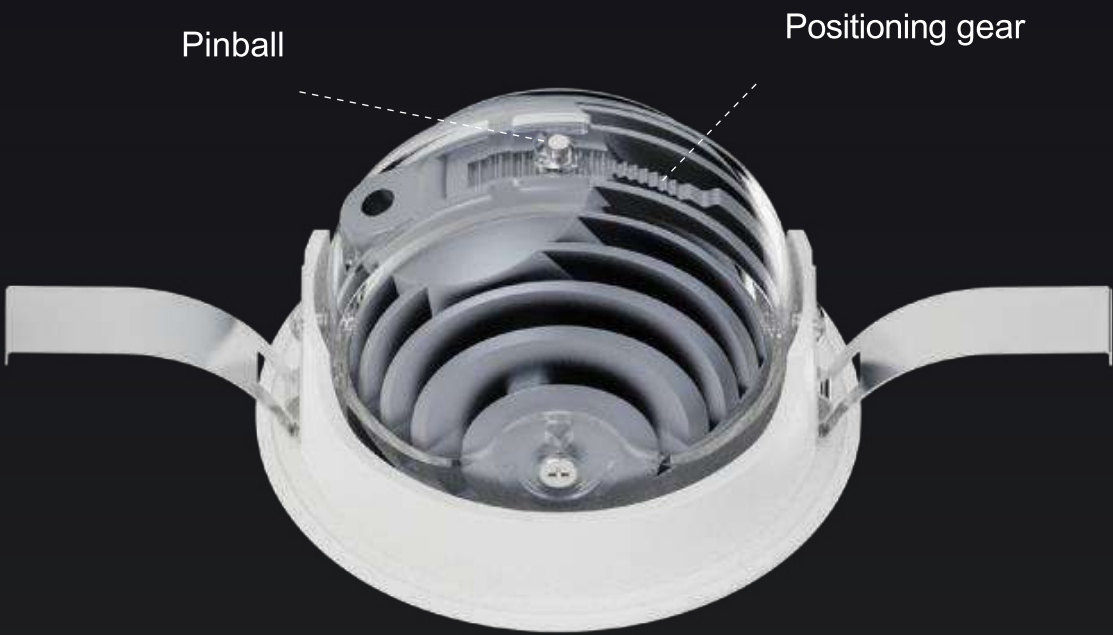

0~30°

Stepless regulation 0~30°at any angle




Positioning
 groove,355°horizontal
 rotation

positioning point and damping to Fool-prof


TRIX SPOTLIGHT

TRIX Front Heads

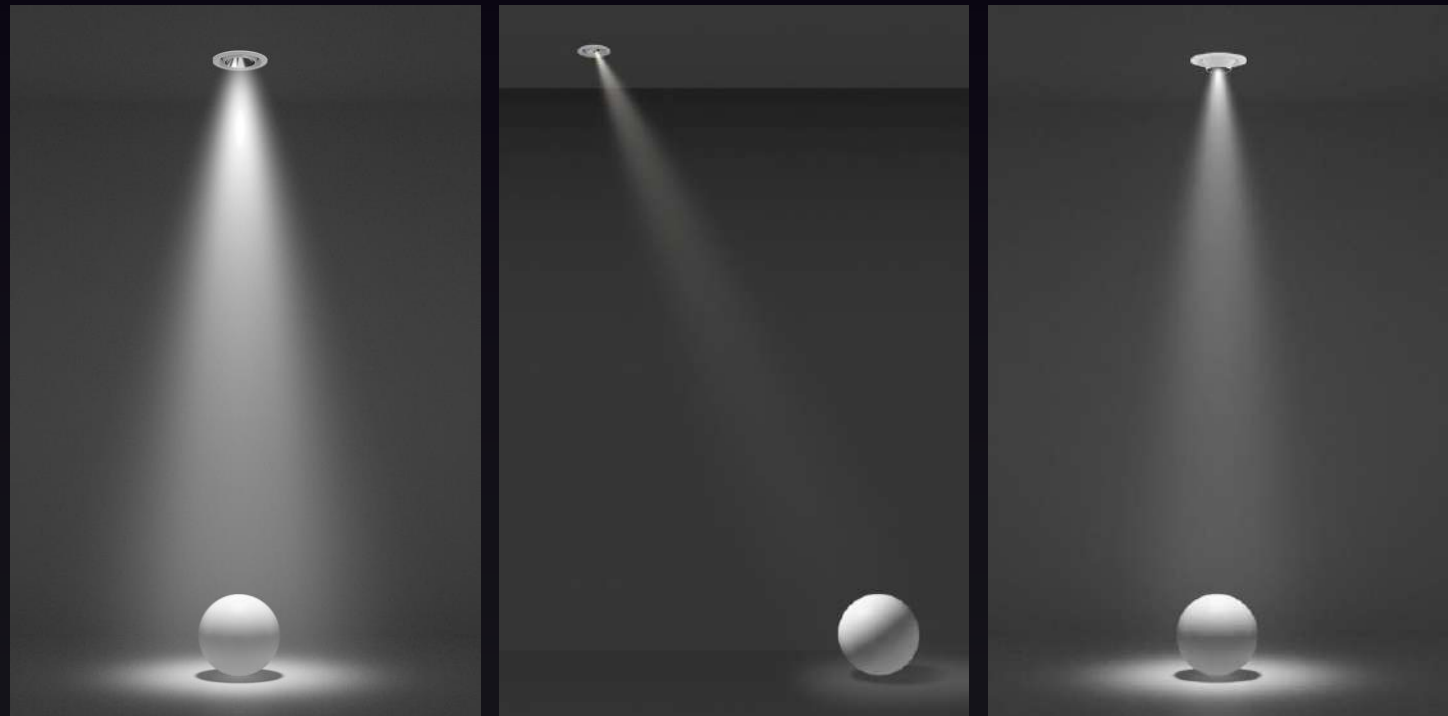

PMMA high luminousrate Ribbed structure lens

Adopting A Ribbed Structure Design, With Built-in Anti Glare Effect, Transparent Luster, Strong Penetration, High Effective Illumination Rate, Precise Visual Beam Angle, And High Light Source Color Gamut Restoration.

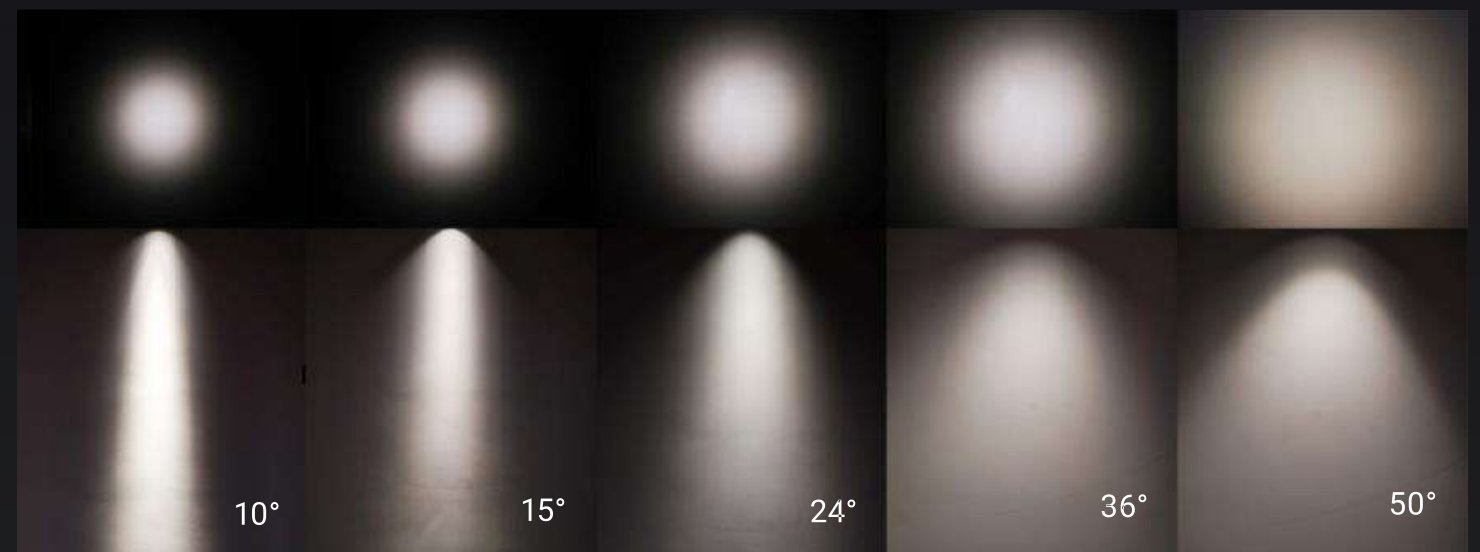



Next-Level Illumination

Step into the future with premium COB lights.

TRIX FACE RING 12W



PRODUCT DETAILS

Model No.	Wattage	Dimensions (in mm)	Cutout (in mm)
VL-LXCB-026A-12W	12W	63X42	55
VL-LXCB-026B-12W	12W	73X51	65
VL-LXCB-026C-12W	12W	85X57	75
VL-LXCB-026D-12W	12W	105X73	95
VL-LXCB-026E-12W	12W	132X89	120


FEATURES:-

- Led : **CREE** LED **bridgelux**
- Body Color : Wh/bk
- Warranty: 3/5 Year
- Thd : < Than 10%
- Output Ripple Current : < 5%
- Power : Factor > 0.95
- Sustains At 300vac For 48 Hrs. & 440vac For 2 Hrs.
- Over Temperature Protection - Thermal Fold Back
- Input Ovp & Uvp Protection
- O/p Open & Short Circuit Protection
- O/p Overload & O/p To Ground Short Circuit Protection.
- Life 50,000hrs At Max Tc.

OTHER VERSIONS:



COLOR OPTIONS:



TRIX TRIMLESS 12W



PRODUCT DETAILS

Model No.	Wattage	Dimensions (in mm)	Cutout (in mm)
VL-LXCB-027A-12W	12W	75X57	108
VL-LXCB-027B-12W	12W	75X73	108
VL-LXCB-027C-12W	12W	75X57	108
VL-LXCB-027D-12W	12W	75X70	108
VL-LXCB-027E-12W	12W	75X57	108


FEATURES:-


- Led : **CREE** LED **bridgelux**
- Body Color : Wh/bk
- Warranty: 3/5 Year
- Thd : < Than 10%
- Output Ripple Current : < 5%
- Power : Factor > 0.95
- Sustains At 300vac For 48 Hrs. & 440vac For 2 Hrs.
- Over Temperature Protection - Thermal Fold Back
- Input Ovp & Uvp Protection
- O/p Open & Short Circuit Protection
- O/p Overload & O/p To Ground Short Circuit Protection.
- Life 50,000hrs At Max Tc.

OTHER VERSIONS:



COLOR OPTIONS:



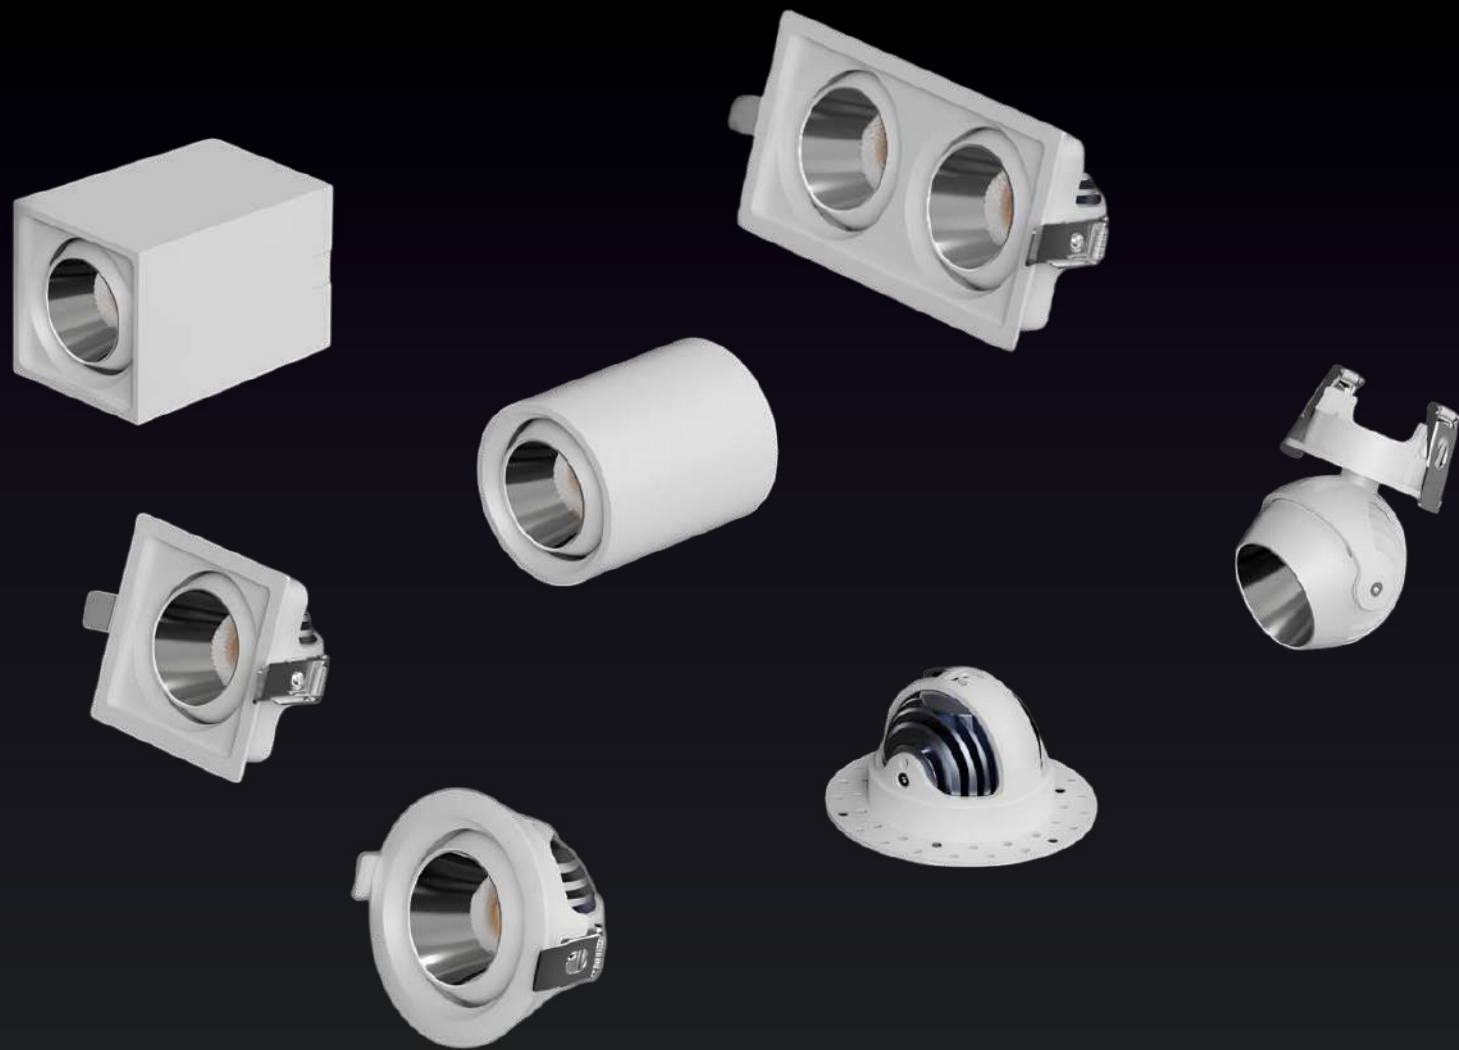

Light That Inspires

Transform any room with subtle brilliance.

TRIX SQUARE 12W



PRODUCT DETAILS

Model No.	Wattage	Dimensions (in mm)	Cutout (in mm)
VL-LXCB-028A-12W	12W	75X61	85X85
VL-LXCB-028B-12W	12W	75X61	85X85
VL-LXCB-028C-12W	12W	75X74	85X85
VL-LXCB-028D-12W	12W	75X61	85X85
VL-LXCB-028E-12W	12W	75X77	85X85

FEATURES:-

Led :

Body Color : Wh/bk

Warranty: 3/5 Year

Thd : < Than 10%

Output Ripple Current : < 5%

Power : Factor > 0.95

Sustains At 300vac For 48 Hrs. & 440vac For 2 Hrs.

Over Temperature Protection - Thermal Fold Back

Input Ovp & Uvp Protection

O/p Open & Short Circuit Protection

O/p Overload & O/p To Ground Short Circuit Protection.

Life 50,000hrs At Max Tc.

TRIX GIMBAL 12W X 2



PRODUCT DETAILS

Model No.	Wattage	Dimensions (in mm)	Cutout (in mm)
VL-LXCB-029A-12W	12W	150X75X62	160X85
VL-LXCB-029B-12W	12W	150X85X62	160X85
VL-LXCB-029C-12W	12W	150X75X74	160X85
VL-LXCB-029D-12W	12W	150X75X62	160X85
VL-LXCB-029E-12W	12W	150X75X77	160X85

FEATURES:-

Led :

Body Color : Wh/bk

Warranty: 3/5 Year

Thd : < Than 10%

Output Ripple Current : < 5%

Power : Factor > 0.95

Sustains At 300vac For 48 Hrs. & 440vac For 2 Hrs.

Over Temperature Protection - Thermal Fold Back


Input Ovp & Uvp Protection

O/p Open & Short Circuit Protection



O/p Overload & O/p To Ground Short Circuit Protection.

Life 50,000hrs At Max Tc.

OTHER VERSIONS:



OTHER VERSIONS:



Architectural Perfection

Lighting crafted for modern, elegant spaces.



TRIX CONCEALED 12W



PRODUCT DETAILS

Model No.	Wattage	Dimensions (in mm)	Cutout (in mm)
VL-LXCB-030A-12W	12W		55
VL-LXCB-030B-12W	12W		65
VL-LXCB-030C-12W	12W		75
VL-LXCB-030D-12W	12W		95
VL-LXCB-030E-12W	12W		120

FEATURES:-

Led : **CREE** LED **bridgelux**

Body Color : Wh/bk

Warranty: 3/5 Year

Thd : < Than 10%

Output Ripple Current : < 5%

Power : Factor > 0.95

Sustains At 300vac For 48 Hrs. & 440vac For 2 Hrs.

Over Temperature Protection - Thermal Fold Back

Input Ovp & Uvp Protection

O/p Open & Short Circuit Protection


O/p Overload & O/p To Ground Short Circuit Protection.

Life 50,000hrs At Max Tc.


OTHER VERSIONS:



COLOR OPTIONS:




TRIX SQUARE SURFACE 12W

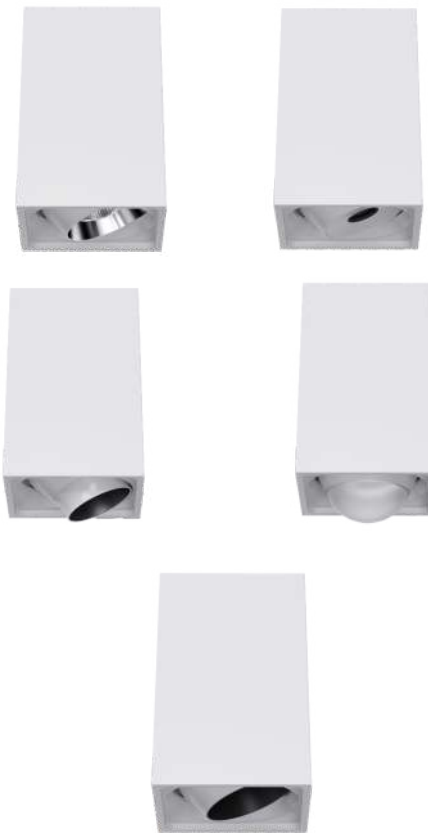

OTHER VERSIONS:




COLOR OPTIONS:




TRIX ROUND SURFACE 12W



OTHER VERSIONS:



COLOR OPTIONS:



PRODUCT DETAILS

Model No.	Wattage	Dimensions (in mm)	Cutout (in mm)
VL-LXCB-031A-12W	12W	118X77	-
VL-LXCB-031B-12W	12W	118X77	-
VL-LXCB-031C-12W	12W	118X77	-
VL-LXCB-031D-12W	12W	118X77	-

FEATURES:-

Led : **CREE** LED **bridgelux**

Body Color : Wh/bk

Warranty: 3/5 Year

Thd : < Than 10%

Output Ripple Current : < 5%

Power : Factor > 0.95

Sustains At 300vac For 48 Hrs. & 440vac For 2 Hrs.

Over Temperature Protection - Thermal Fold Back

Input Ovp & Uvp Protection

O/p Open & Short Circuit Protection

O/p Overload & O/p To Ground Short Circuit Protection.

Life 50,000hrs At Max Tc.

PRODUCT DETAILS

Model No.	Wattage	Dimensions (in mm)	Cutout (in mm)
VL-LXCB-032-7W	12W	101X77	55
VL-LXCB-032-7W	12W	101X77	65
VL-LXCB-032-12W	12W	116X77	75
VL-LXCB-032-12W	12W	118X77	95

FEATURES:-

Led : **CREE** LED **bridgelux**

Body Color : Wh/bk

Warranty: 3/5 Year

Thd : < Than 10%

Output Ripple Current : < 5%

Power : Factor > 0.95

Sustains At 300vac For 48 Hrs. & 440vac For 2 Hrs.

Over Temperature Protection - Thermal Fold Back

Input Ovp & Uvp Protection

O/p Open & Short Circuit Protection

O/p Overload & O/p To Ground Short Circuit Protection.

Life 50,000hrs At Max Tc.



A Variety Of Anti-dazzle Cup Free Collocation

Advanced process building, color resistance and anticorrosion performance fine texture,
long-term use is still as new



Designed To Dazzle

Add style, power, and precision to every corner.

BONO SPOTLIGHT



PRODUCT DETAILS

Model No.	Wattage	Dimensions (in mm)	Cutout (in mm)
VL-LXCB-033-7W	5-8W	62X59	55
VL-LXCB-033-7W	10-12W	85X64	75
VL-LXCB-033-12W	15-18W	105X72	95
	18-22W	130X73	115
	25-35W	170X80	145
	40-50W	195X85	170

FEATURES:-

Led :  

Body Color : Wh/bk

Warranty: 3/5 Year

Thd : < Than 10%

Output Ripple Current : < 5%

Power : Factor > 0.95

Sustains At 300vac For 48 Hrs. & 440vac For 2 Hrs.

Over Temperature Protection - Thermal Fold Back


Input Ovp & Uvp Protection

O/p Open & Short Circuit Protection

O/p Overload & O/p To Ground Short Circuit Protection.


Life 50,000hrs At Max Tc.

OTHER VERSIONS:



Beam Angle :
24°/36°/55°

COLOR OPTIONS:



BONO TRIMLESS



PRODUCT DETAILS

Model No.	Wattage	Dimensions (in mm)	Cutout (in mm)
VL-LXCB-034-10W	10W	110	75
VL-LXCB-034-12W	12W	110	75

FEATURES:-

Led :  

Body Color : Wh/bk

Warranty: 3/5 Year

Thd : < Than 10%

Output Ripple Current : < 5%

Power : Factor > 0.95

Sustains At 300vac For 48 Hrs. & 440vac For 2 Hrs.

Over Temperature Protection - Thermal Fold Back


Input Ovp & Uvp Protection

O/p Open & Short Circuit Protection

O/p Overload & O/p To Ground Short Circuit Protection.


Life 50,000hrs At Max Tc.

OTHER VERSIONS:



Beam Angle :
24°/36°/55°

COLOR OPTIONS:



Luxury in Light

Experience Lighting That Defines
Sophistication.



OMNIS

PRODUCT DETAILS

Model No.	Wattage	Dimensions (in mm)	Cutout (in mm)
VL-LXCB-035-8W	8W	62X72	55
VL-LXCB-035-12W	12W	72X72	65
VL-LXCB-035-15W	15W	82X82	75

FEATURES:-


- Led : **CREE** LED **bridgelux**
- Body Color : Wh/bk
- Warranty: 3/5 Year
- Thd : < Than 10%
- Output Ripple Current : < 5%
- Power : Factor > 0.95
- Sustains At 300vac For 48 Hrs. & 440vac For 2 Hrs.
- Over Temperature Protection - Thermal Fold Back
- Input Ovp & Uvp Protection
- O/p Open & Short Circuit Protection
- O/p Overload & O/p To Ground Short Circuit Protection.
- Life 50,000hrs At Max Tc.

OTHER VERSIONS:




Beam Angle :
36°/50°/60°/70°

COLOR OPTIONS:



Light Crafted Smart

Engineered for clarity, designed for endurance.

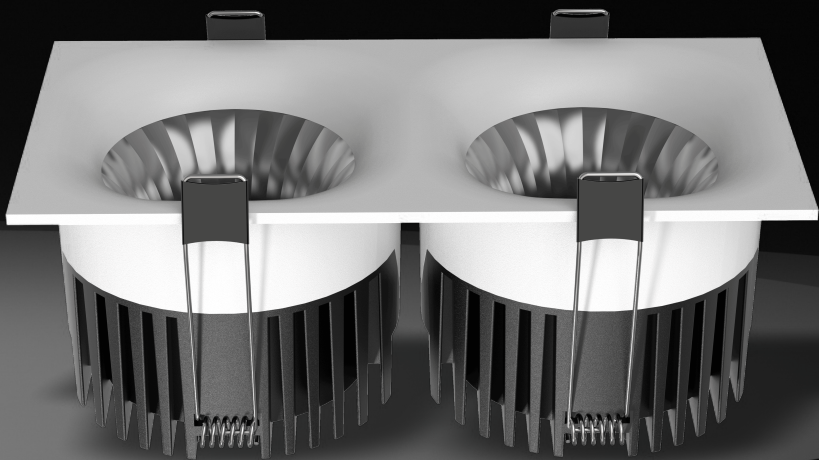

TORTOISE RD



PRODUCT DETAILS

Model No.	Wattage	Dimensions (in mm)	Cutout (in mm)
VL-LXCB-036-7W	7W	65x52	55
VL-LXCB-036-7W	7W	85X56	75
VL-LXCB-036-12W	12W	105X68	95

FEATURES:-

Led : **CREE** LED 

Body Color : Wh/bk

Warranty: 3/5 Year

Thd : < Than 10%

Output Ripple Current : < 5%

Power : Factor > 0.95

Sustains At 300vac For 48 Hrs. & 440vac For 2 Hrs.

Over Temperature Protection - Thermal Fold Back

Input Ovp & Uvp Protection

O/p Open & Short Circuit Protection


O/p Overload & O/p To Ground Short Circuit Protection.

Life 50,000hrs At Max Tc.


OTHER VERSIONS:



Beam Angle :
36°/50°/60°/70°



TORTOISE DUO

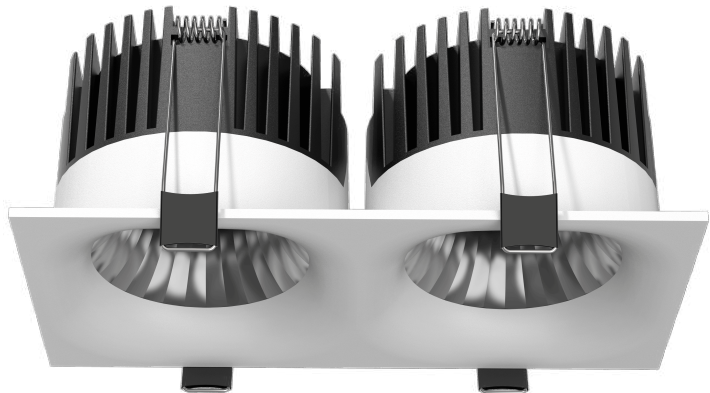

PRODUCT DETAILS

Model No.	Wattage	Dimensions (in mm)	Cutout (in mm)
VL-LXCB-037-7W	7W	65x52	55
VL-LXCB-037-7W	7W	85X56	75
VL-LXCB-037-12W	12W	105X68	95

FEATURES:-

Led : **CREE** LED 

Body Color : Wh/bk

Warranty: 3/5 Year

Thd : < Than 10%

Output Ripple Current : < 5%

Power : Factor > 0.95

Sustains At 300vac For 48 Hrs. & 440vac For 2 Hrs.

Over Temperature Protection - Thermal Fold Back

Input Ovp & Uvp Protection

O/p Open & Short Circuit Protection


O/p Overload & O/p To Ground Short Circuit Protection.

Life 50,000hrs At Max Tc.

OTHER VERSIONS:



Beam Angle :
36°/50°/60°/70°



GLORIA LED SPOTLIGHT


0-30° vertically tiltable

0-355° horizontally rotatable



Precision Meets Elegance

Engineered perfection for modern interiors.

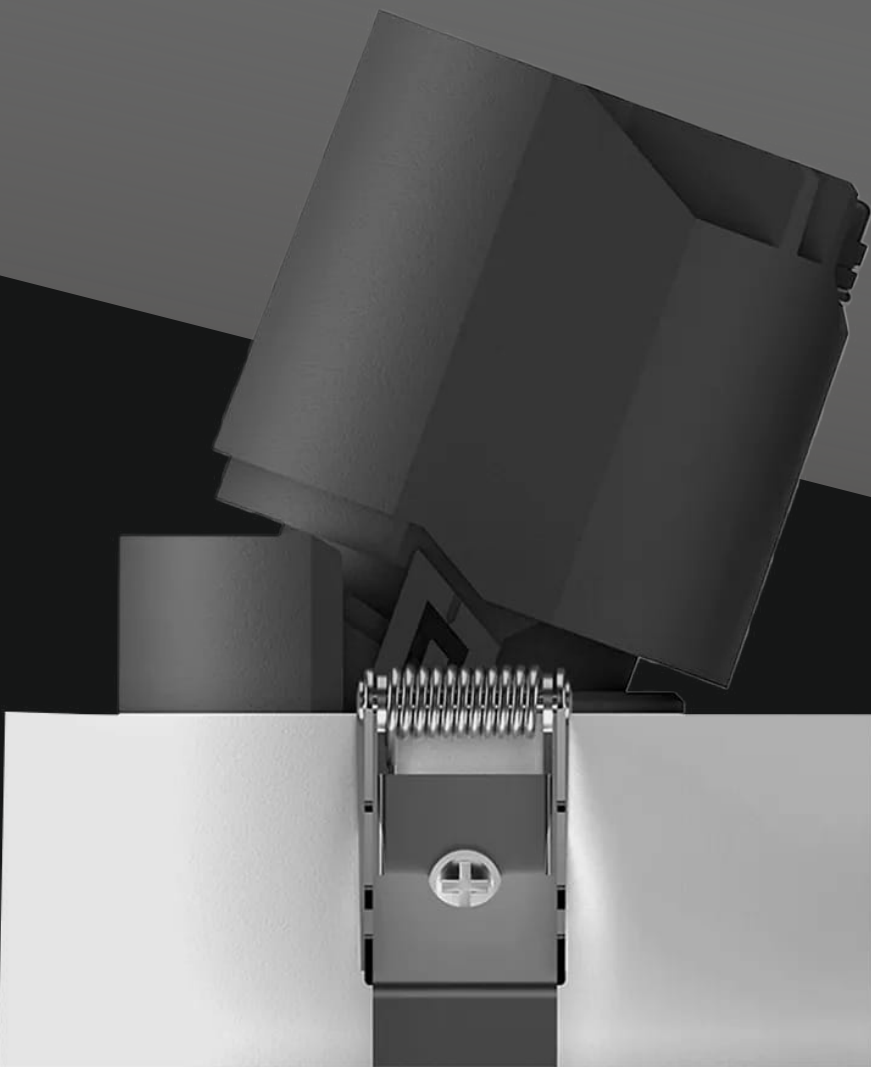

GLORIA



PRODUCT DETAILS

Model No.	Wattage	Dimensions (in mm)	Cutout (in mm)
VL-LXCB-038-7W	7W	61X79	55
VL-LXCB-038-12/15W	12/15W	84x100	75
VL-LXCB-038-20W	20W	110x122	95

FEATURES:-

Led :  

Body Color : Wh/bk

Warranty: 3/5 Year

Thd : < Than 10%

Output Ripple Current : < 5%

Power : Factor > 0.95

Sustains At 300vac For 48 Hrs. & 440vac For 2 Hrs.

Over Temperature Protection - Thermal Fold Back

Input Ovp & Uvp Protection

O/p Open & Short Circuit Protection

O/p Overload & O/p To Ground Short Circuit Protection.


Life 50,000hrs At Max Tc.

OTHER VERSIONS:



Beam Angle :

COLOR OPTIONS:



GLORIA-T



PRODUCT DETAILS

Model No.	Wattage	Dimensions (in mm)	Cutout (in mm)
VL-LXCB-039-7W	7W	61X79	55
VL-LXCB-039-12/15W	12/15W	84X100	75
VL-LXCB-039-20W	20W	110X122	95

FEATURES:-

Led :  

Body Color : Wh/bk

Warranty: 3/5 Year

Thd : < Than 10%

Output Ripple Current : < 5%

Power : Factor > 0.95

Sustains At 300vac For 48 Hrs. & 440vac For 2 Hrs.

Over Temperature Protection - Thermal Fold Back


Input Ovp & Uvp Protection

O/p Open & Short Circuit Protection

O/p Overload & O/p To Ground Short Circuit Protection.


Life 50,000hrs At Max Tc.

OTHER VERSIONS:



Beam Angle :

COLOR OPTIONS:



COB SERIES






The Art Of Light

Every COB crafted like a piece of art.

GLORIA 2T



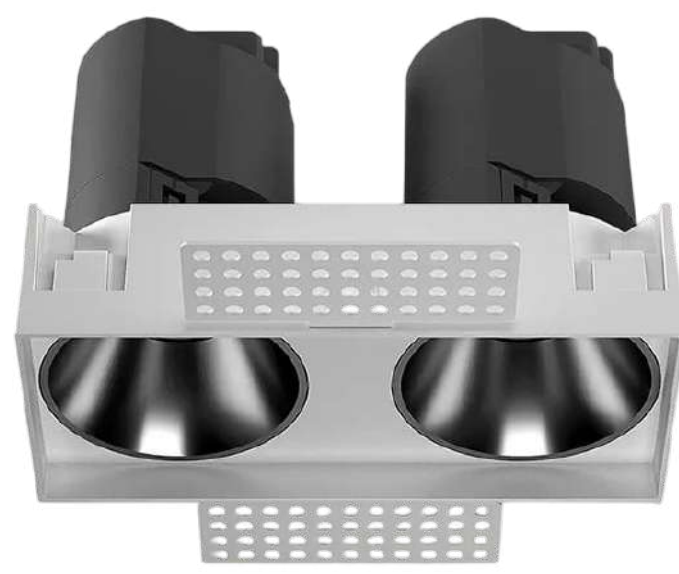

Model No.	Wattage	Diamensions (in mm)	Cutout (in mm)
VL-LXCB-041-7W	2X7W	130X69X85	121X60
VL-LXCB-041-7W	2X12/15W	180X91X100	164X77
VL-LXCB-041-12W	2X20W	224X110X139	209X97

FEATURES:-

Led :  

Body Color : Wh/bk

Warranty: 3/5 Year

Thd : < Than 10%

Output Ripple Current : < 5%

Power : Factor > 0.95

Sustains At 300vac For 48 Hrs. & 440vac For 2 Hrs.

Over Temperature Protection - Thermal Fold Back

Input Ovp & Uvp Protection

O/p Open & Short Circuit Protection


O/p Overload & O/p To Ground Short Circuit Protection.

Life 50,000hrs At Max Tc.

OTHER VERSIONS:



Beam Angle :



GLORIA 2S



Model No.	Wattage	Diamensions (in mm)	Cutout (in mm)
VL-LXCB-040-7W	2X7W	130X69X85	121X60
VL-LXCB-040-7W	2X12/15W	180X91X100	164X77
VL-LXCB-040-12W	2X20W	224X110X139	209X97

FEATURES:-

Led :  

Body Color : Wh/bk

Warranty: 3/5 Year

Thd : < Than 10%

Output Ripple Current : < 5%

Power : Factor > 0.95

Sustains At 300vac For 48 Hrs. & 440vac For 2 Hrs.

Over Temperature Protection - Thermal Fold Back

Input Ovp & Uvp Protection

O/p Open & Short Circuit Protection


O/p Overload & O/p To Ground Short Circuit Protection.

Life 50,000hrs At Max Tc.

OTHER VERSIONS:



Beam Angle :



GLORIA 2R



Model No.	Wattage	Diamensions (in mm)	Cutout (in mm)
VL-LXCB-042-7W	2X7W	130X69X85	121X60
VL-LXCB-042-7W	2X12/15W	180X91X100	164X77
VL-LXCB-042-12W	2X20W	224X110X139	209X97

FEATURES:-

Led :  

Body Color : Wh/bk

Warranty: 3/5 Year

Thd : < Than 10%

Output Ripple Current : < 5%

Power : Factor > 0.95

Sustains At 300vac For 48 Hrs. & 440vac For 2 Hrs.

Over Temperature Protection - Thermal Fold Back

Input Ovp & Uvp Protection

O/p Open & Short Circuit Protection


O/p Overload & O/p To Ground Short Circuit Protection.

Life 50,000hrs At Max Tc.

OTHER VERSIONS:



Beam Angle :



42

www.virtuallights.in

www.virtuallights.in

Pinhole Max

Lighting That Performs
With Passion And Precision.



PINHOLE MAX

PRODUCT DETAILS

Model No.	Wattage	Dimensions (in mm)	Cutout (in mm)
VL-LXCB-043-7W	5W	65X51	55
VL-LXCB-043-7W	8W	75X59	65
VL-LXCB-043-12W	10W	85X59	75
	12W	105X62	95



FEATURES:-


- Led :** CREE LED
- Body Color :** Wh/bk
- Warranty:** 3/5 Year
- Thd :** < Than 10%
- Output Ripple Current :** < 5%
- Power :** Factor > 0.95
- Sustains At 300vac For 48 Hrs. & 440vac For 2 Hrs.
- Over Temperature Protection - Thermal Fold Back
- Input Ovp & Uvp Protection
- O/p Open & Short Circuit Protection
- O/p Overload & O/p To Ground Short Circuit Protection.
- Life 50,000hrs At Max Tc.

OTHER VERSIONS:




Beam Angle :
24°/36°

COLOR OPTIONS:



COB Glow Essence

Efficient light with elegant appeal.

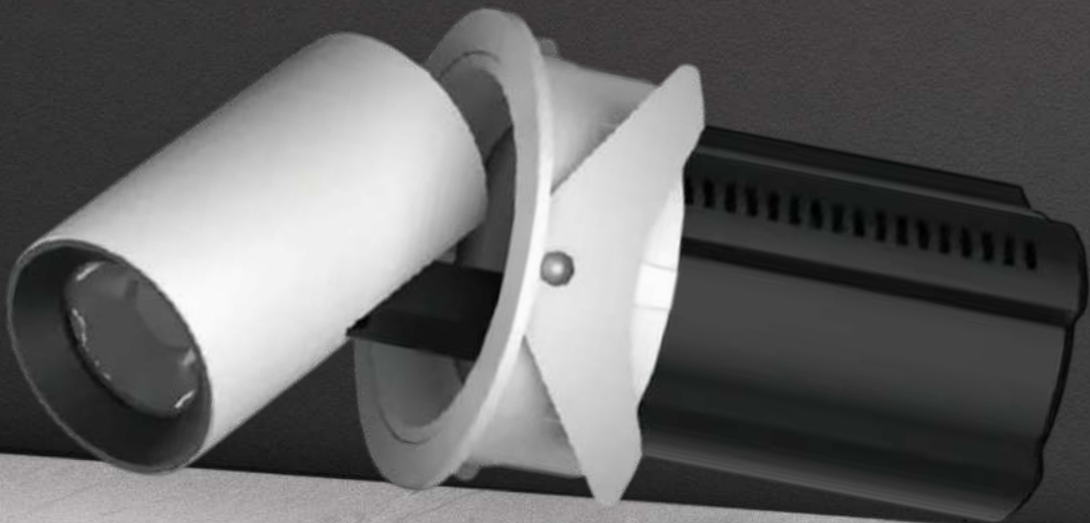

BAMBOO



PRODUCT DETAILS

Model No.	Wattage	Dimensions (in mm)	Cutout (in mm)
VL-LXCB-044-7W	7W	62X86	58
VL-LXCB-044-7W	12W	84X104	75
VL-LXCB-044-12W	20W	110X127	95

FEATURES:-

Led :  

Body Color : Wh/bk

Warranty: 3/5 Year

Thd : < Than 10%

Output Ripple Current : < 5%

Power : Factor > 0.95

Sustains At 300vac For 48 Hrs. & 440vac For 2 Hrs.

Over Temperature Protection - Thermal Fold Back

Input Ovp & Uvp Protection

O/p Open & Short Circuit Protection

O/p Overload & O/p To Ground Short Circuit Protection.


Life 50,000hrs At Max Tc.

OTHER VERSIONS:



Beam Angle : 

COLOR OPTIONS:



BAMBOO-T



PRODUCT DETAILS

Model No.	Wattage	Dimensions (in mm)	Cutout (in mm)
VL-LXCB-045-7W	7W	62X86	58
VL-LXCB-045-7W	12W	84X104	75
VL-LXCB-045-12W	20W	110X127	95

FEATURES:-

Led :  

Body Color : Wh/bk

Warranty: 3/5 Year

Thd : < Than 10%

Output Ripple Current : < 5%

Power : Factor > 0.95

Sustains At 300vac For 48 Hrs. & 440vac For 2 Hrs.

Over Temperature Protection - Thermal Fold Back

Input Ovp & Uvp Protection

O/p Open & Short Circuit Protection

O/p Overload & O/p To Ground Short Circuit Protection.


Life 50,000hrs At Max Tc.

OTHER VERSIONS:



Beam Angle : 

COLOR OPTIONS:



Ray Of Excellence

Lighting that performs with passion and precision.



BAMBOO-2S

PRODUCT DETAILS

Model No.	Wattage	Dimensions (in mm)	Cutout (in mm)
VL-LXCB-046-7W	7X2W	130X69X91	121X60
VL-LXCB-046-7W	12X2W	180X91X116	164X77
VL-LXCB-046-12W	20X2W	224X110X142	209X97

FEATURES:-

Led : **CREE** LED **bridgelux**

Body Color : Wh/bk

Warranty: 3/5 Year

Thd : < Than 10%

Output Ripple Current : < 5%

Power : Factor > 0.95

Sustains At 300vac For 48 Hrs. & 440vac For 2 Hrs.

Over Temperature Protection - Thermal Fold Back


Input Ovp & Uvp Protection

O/p Open & Short Circuit Protection

O/p Overload & O/p To Ground Short Circuit Protection.


Life 50,000hrs At Max Tc.

OTHER VERSIONS:



Beam Angle :

COLOR OPTIONS:



BAMBOO-2R




OTHER VERSIONS:



Beam Angle :

COLOR OPTIONS:



BAMBOO-2RT




OTHER VERSIONS:



Beam Angle :

COLOR OPTIONS:



PRODUCT DETAILS

Model No.	Wattage	Dimensions (in mm)	Cutout (in mm)
VL-LXCB-047-7W	7X2W	130X69X91	121X60
VL-LXCB-047-7W	12X2W	180X91X116	164X77
VL-LXCB-047-12W	20X2W	224X110X142	209X97

FEATURES:-

Led : **CREE** LED **bridgelux**

Body Color : Wh/bk

Warranty: 3/5 Year

Thd : < Than 10%

Output Ripple Current : < 5%

Power : Factor > 0.95

Sustains At 300vac For 48 Hrs. & 440vac For 2 Hrs.

Over Temperature Protection - Thermal Fold Back

Input Ovp & Uvp Protection

O/p Open & Short Circuit Protection

O/p Overload & O/p To Ground Short Circuit Protection.

Life 50,000hrs At Max Tc.

PRODUCT DETAILS

Model No.	Wattage	Dimensions (in mm)	Cutout (in mm)
VL-LXCB-048-7W	7WX2	130X69X85	121X60
VL-LXCB-048-7W	12/15X2W	180X91X100	164X77
VL-LXCB-048-12W	20WX2	224X110X139	209X97

FEATURES:-

Led : **CREE** LED **bridgelux**

Body Color : Wh/bk

Warranty: 3/5 Year

Thd : < Than 10%

Output Ripple Current : < 5%

Power : Factor > 0.95

Sustains At 300vac For 48 Hrs. & 440vac For 2 Hrs.

Over Temperature Protection - Thermal Fold Back

Input Ovp & Uvp Protection

O/p Open & Short Circuit Protection

O/p Overload & O/p To Ground Short Circuit Protection.

Life 50,000hrs At Max Tc.

Light Crafted Fine

The art of precision meets pure radiance.



BAMBOO MAX

PRODUCT DETAILS

Model No.	Wattage	Dimensions (in mm)	Cutout (in mm)
VL-LXCB-049-7W	3W	62X252	55
VL-LXCB-049-7W	8W	62X252	55

VL-LXCB-049-12W

FEATURES:-

Led : **CREE** LED **bridgelux**

Body Color : Wh/bk

Warranty: 3/5 Year

Thd : < Than 10%

Output Ripple Current : < 5%

Power : Factor > 0.95

Sustains At 300vac For 48 Hrs. & 440vac For 2 Hrs.

Over Temperature Protection - Thermal Fold Back

Input Ovp & Uvp Protection

O/p Open & Short Circuit Protection


O/p Overload & O/p To Ground Short Circuit Protection.

Life 50,000hrs At Max Tc.

OTHER VERSIONS:



COLOR OPTIONS:



BAMBOO PRO

PRODUCT DETAILS

Model No.	Wattage	Dimensions (in mm)	Cutout (in mm)
VL-LXCB-050-7W	7W	66X67	60

FEATURES:-

Led : **CREE** LED **bridgelux**

Body Color : Wh/bk

Warranty: 3/5 Year

Thd : < Than 10%

Output Ripple Current : < 5%

Power : Factor > 0.95

Sustains At 300vac For 48 Hrs. & 440vac For 2 Hrs.

Over Temperature Protection - Thermal Fold Back

Input Ovp & Uvp Protection

O/p Open & Short Circuit Protection

O/p Overload & O/p To Ground Short Circuit Protection.


Life 50,000hrs At Max Tc.




OTHER VERSIONS:



COLOR OPTIONS:




See Light Differently With
Superior Optics.

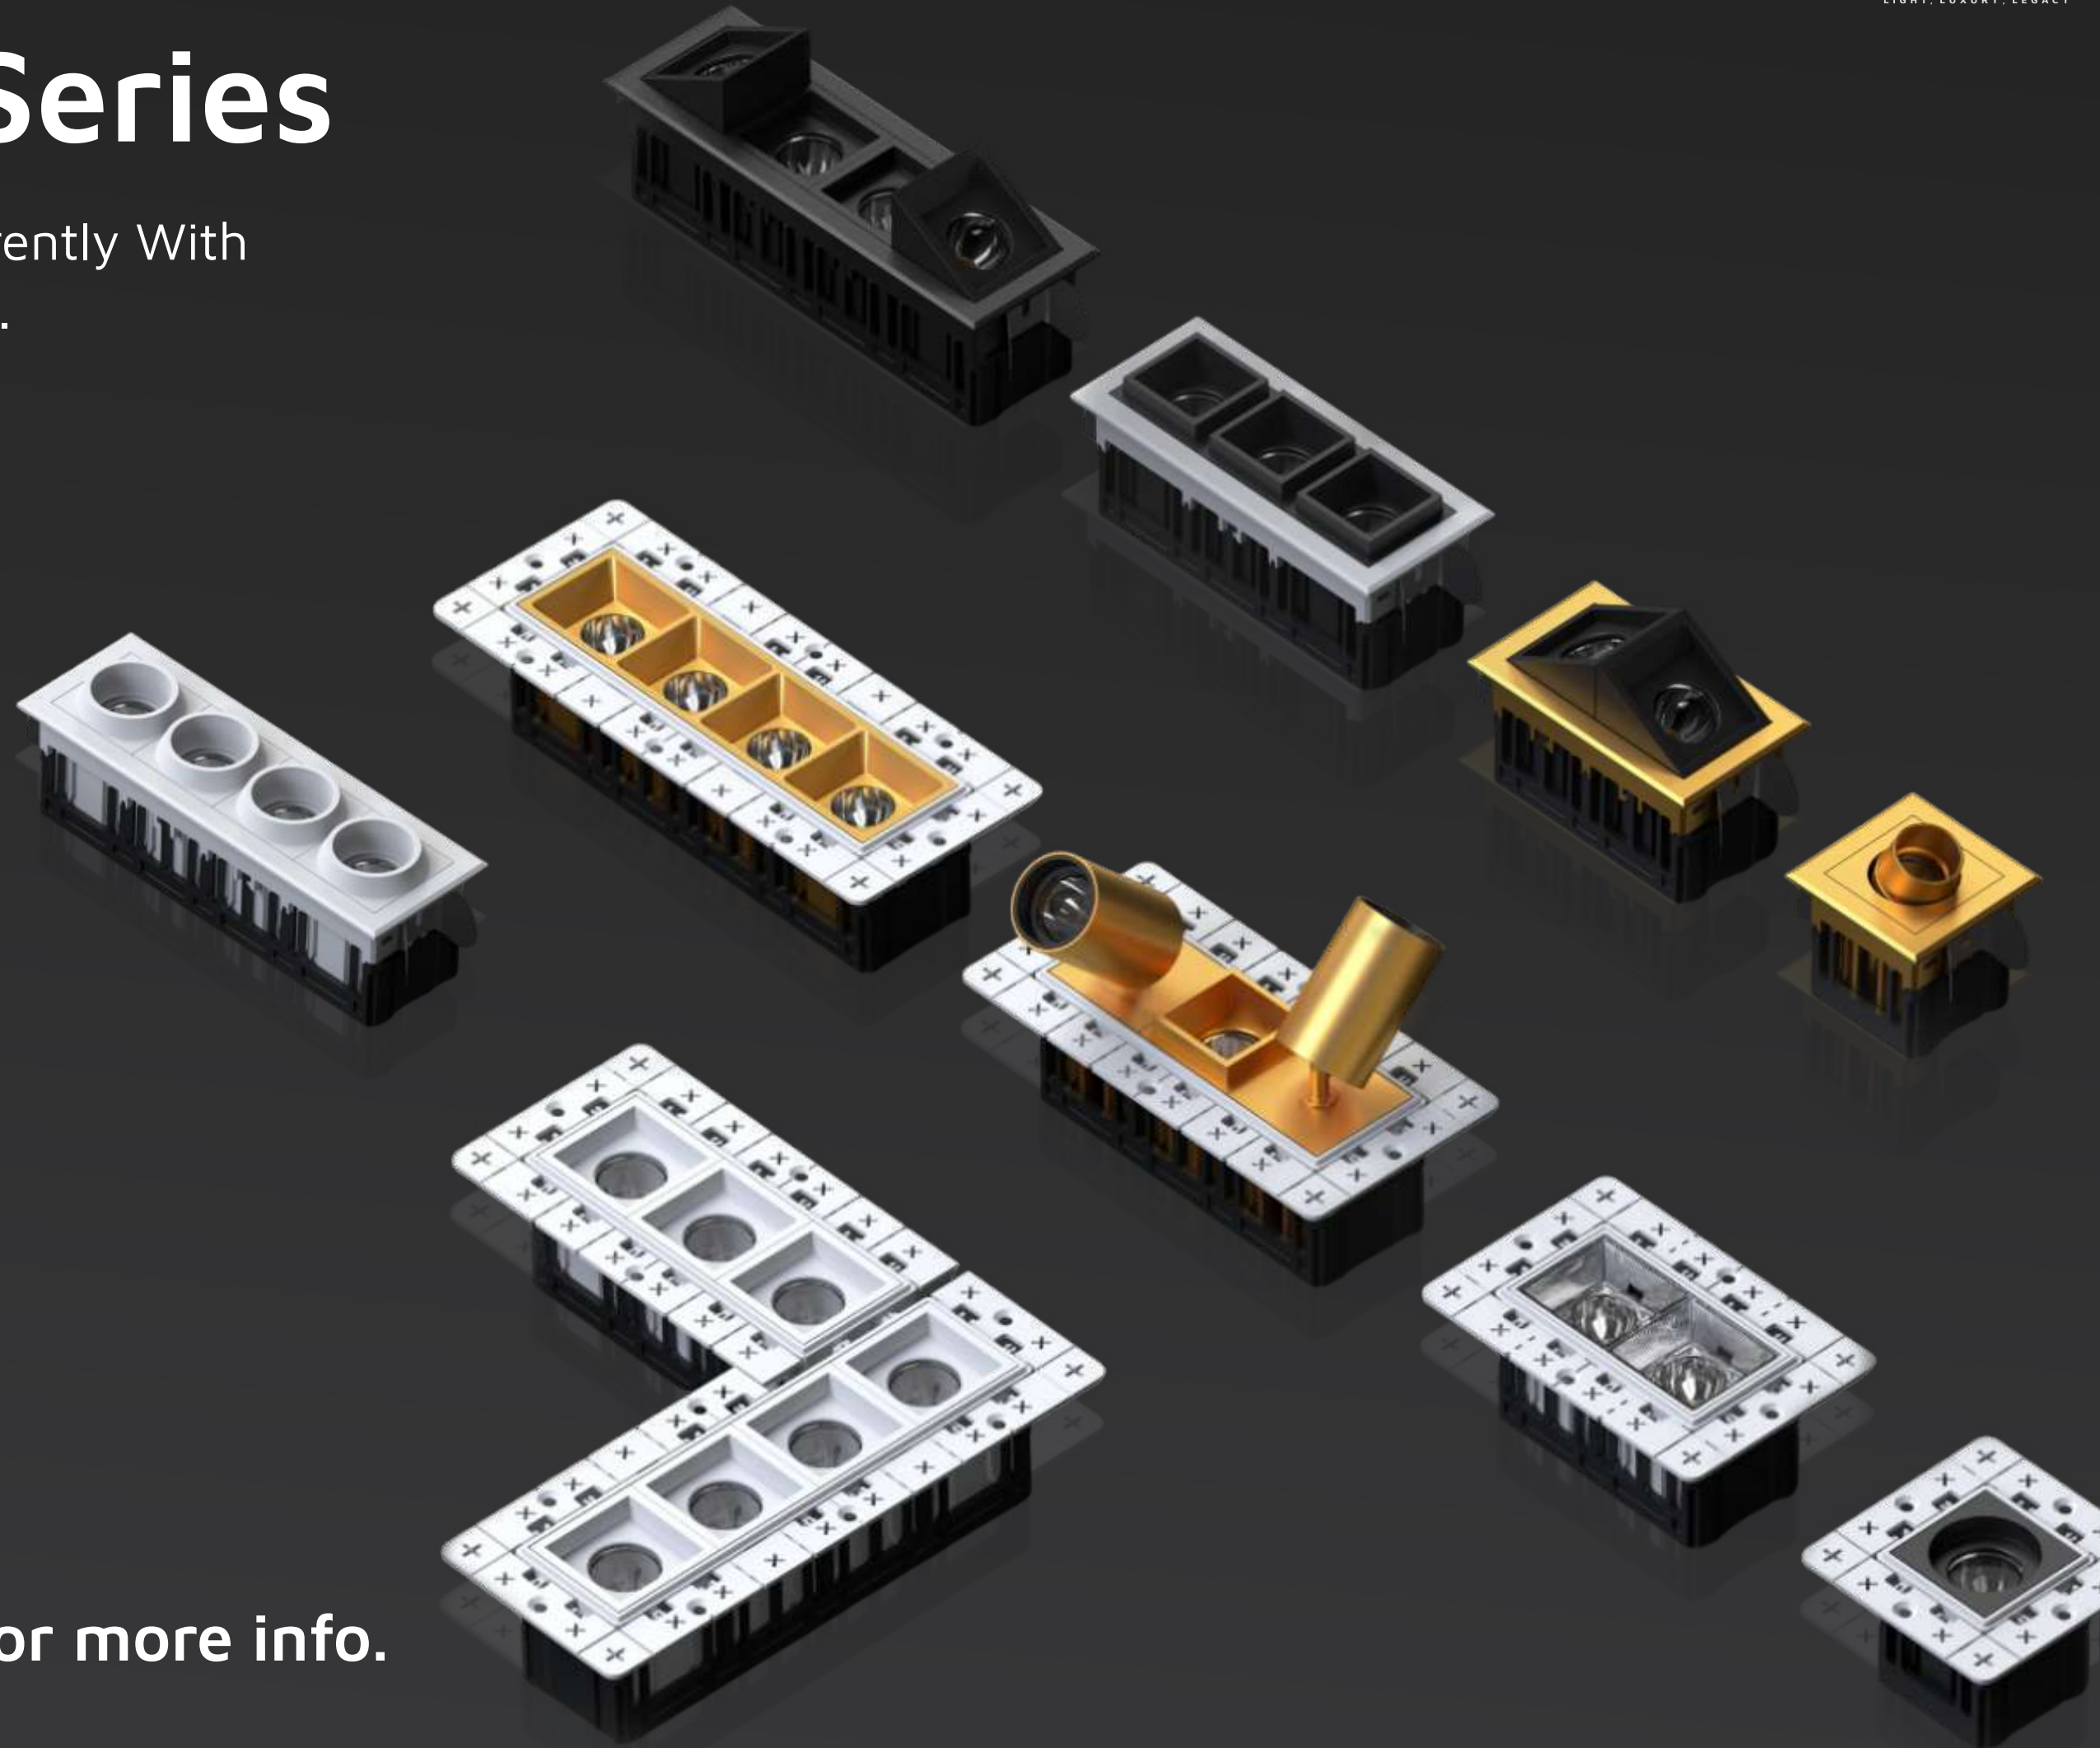

Ask Details for more info.

Glow Beyond Vision

See light differently with superior optics.

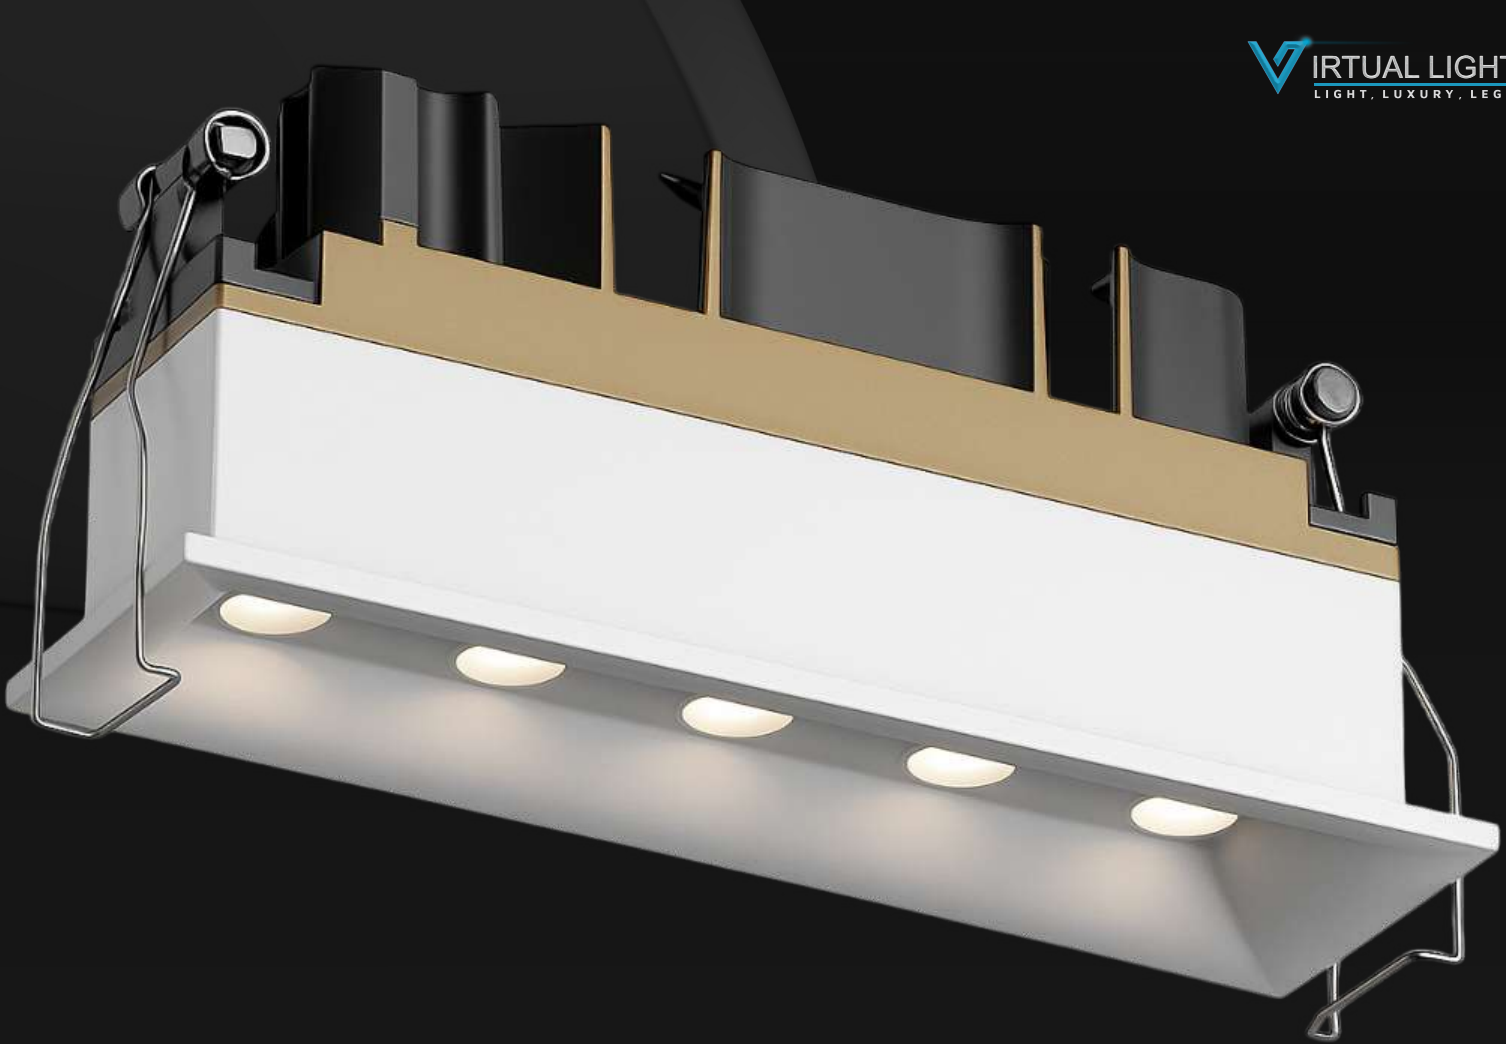

DOTLINE PRO - FIX

PRODUCT DETAILS

Model No.	Wattage	Dimensions (in mm)	Cutout (in mm)
VL-LXCB-051-7W	12W	114X35X43	108X29

FEATURES:-

Led : **CREE** LED **bridgelux**

Body Color : Wh/bk

Warranty: 3/5 Year

Thd : < Than 10%

Output Ripple Current : < 5%

Power : Factor > 0.95

Sustains At 300vac For 48 Hrs. & 440vac For 2 Hrs.


Over Temperature Protection - Thermal Fold Back

Input Ovp & Uvp Protection

O/p Open & Short Circuit Protection

O/p Overload & O/p To Ground Short Circuit Protection.


Life 50,000hrs At Max Tc.

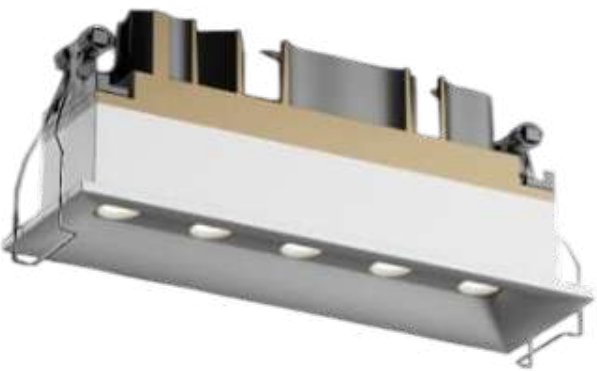

OTHER VERSIONS:



COLOR OPTIONS:



DOTLINE PRO - FIX

PRODUCT DETAILS

Model No.	Wattage	Dimensions (in mm)	Cutout (in mm)
VL-LXCB-052-7W	10W	66X67	60

VL-LXCB-052-7W

VL-LXCB-052-12W

FEATURES:-

Led : **CREE** LED **bridgelux**

Body Color : Wh/bk

Warranty: 3/5 Year

Thd : < Than 10%

Output Ripple Current : < 5%

Power : Factor > 0.95

Sustains At 300vac For 48 Hrs. & 440vac For 2 Hrs.

Over Temperature Protection - Thermal Fold Back

Input Ovp & Uvp Protection

O/p Open & Short Circuit Protection

O/p Overload & O/p To Ground Short Circuit Protection.


Life 50,000hrs At Max Tc.



OTHER VERSIONS:



COLOR OPTIONS:



Heart of Illumination

Lighting that defines your space's soul.



DOTLINE PRO - MOVABLE

PRODUCT DETAILS

Model No.	Wattage	Dimensions (in mm)	Cutout (in mm)
VL-LXCB-053-7W	12W	118X46X43	111X40



FEATURES:-

Led : **CREE** LED **bridgelux**

Body Color : Wh/bk

Warranty: 3/5 Year

Thd : < Than 10%

Output Ripple Current : < 5%

Power : Factor > 0.95

Sustains At 300vac For 48 Hrs. & 440vac For 2 Hrs.

Over Temperature Protection - Thermal Fold Back


Input Ovp & Uvp Protection

O/p Open & Short Circuit Protection


O/p Overload & O/p To Ground Short Circuit Protection.

Life 50,000hrs At Max Tc.

OTHER VERSIONS:



COLOR OPTIONS:



DOTLINE PRO - TRIMLESS

PRODUCT DETAILS

Model No.	Wattage	Dimensions (in mm)	Cutout (in mm)
VL-LXCB-054-7W	12W	132X53X43	108X29



FEATURES:-

Led : **CREE** LED **bridgelux**

Body Color : Wh/bk

Warranty: 3/5 Year

Thd : < Than 10%

Output Ripple Current : < 5%

Power : Factor > 0.95

Sustains At 300vac For 48 Hrs. & 440vac For 2 Hrs.

Over Temperature Protection - Thermal Fold Back

Input Ovp & Uvp Protection

O/p Open & Short Circuit Protection


O/p Overload & O/p To Ground Short Circuit Protection.

Life 50,000hrs At Max Tc.

OTHER VERSIONS:



COLOR OPTIONS:





+91 96879 16304 | +91 93759 10028
info@virtuallights.in | www.virtuallights.in

DISPLAY GALLERY

M-001, GF, Sg Business Hub, Bhagwat vidyapith, SG Hwy,
opp. Agrawal Mall, Gota, Ahmedabad, Gujarat 380060

CORPORATE OFFICE

B-443 to 446, Sumel Business Park, Safal-4, Naroda Rd,
Amdupura, Saraspur, Ahmedabad, Gujarat 382345