







DIMENSIONS (MM)

Wattages- 12 Watt Lumens- 1200 Lumens

Light Degree



POWERSUPPLY

Driver

CHIP



COLOR TEMPERATURE

3000K / 4000K / 5000K / 6500K

COLOR RENDERING INDEX

80Ra

90Ra

INSTALLATION

Surface Mounted 8400

STANDARDS & COMPLIANCES














Product Features:

Super mini design, high quality LED light source, the perfect lighting, create a fruity, full incomparable perfect light type.

The spectrum does not contain red, ultraviolet light, protect the subject, does not contain harmful substances mercury. More suitable for the pavilion, the museum exhibition space, such as display ark, clothes closet and other places, have the effect of key lighting.


DIMENSIONS (mm)

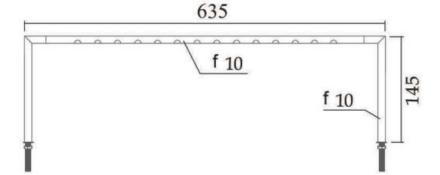

AJL12L



DIMENSIONS (mm)

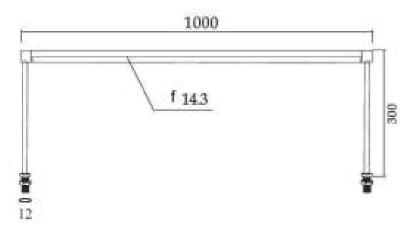



DIMENSIONS (MM)

Wattages- 18 Watt Lumens- 1500 Lumens

Light Degree

120°

POWERSUPPLY

DC12V

CHIP



COLOR TEMPERATURE

3000K / 4000K / 5000K / 6500K

COLOR RENDERING INDEX

80Ra

90Ra

INSTALLATION

Surface Mounted 3000/4000/6000/7600/8600/10,000

STANDARDS & COMPLIANCES













Product Features:

Super mini design, high quality LED light source, the perfect lighting, create a fruity, full incomparable perfect light type.


The spectrum does not contain red, ultraviolet light, protect the subject, does not contain harmful substances mercury. More suitable for the pavilion, the museum exhibition space, such as display ark, clothes closet and other places,

have the effect of key lighting

AJL12L



DIMENSIONS (mm)

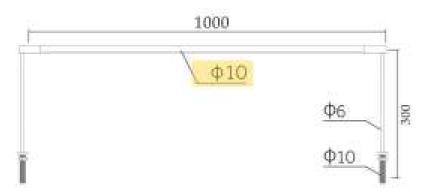



DIMENSIONS (MM)

Wattages- 12 Watt Lumens- 95 Lumens

Light Degree



POWERSUPPLY

DC 24V

CHIP



COLOR TEMPERATURE

3000K / 4000K / 5000K / 6500K

COLOR RENDERING INDEX

80Ra

90Ra

INSTALLATION

Surface Mounted 3000/4000/6000/7600/8600/10,000

STANDARDS & COMPLIANCES















Product Features:

Super mini design, high quality LED light source, the perfect lighting, create a fruity, full incomparable perfect light type.


The spectrum does not contain red, ultraviolet light, protect the subject, does not contain harmful substances mercury. More suitable for the pavilion, the museum exhibition space, such as display ark, clothes closet and other places,

have the effect of key lightin


AJT3F



DIMENSIONS (mm)



Illuminance Flow





DIMENSIONS (MM)

Wattages- 3 Watt Lumens- 250Lumens

Light Degree

3O°



POWERSUPPLY

DC 24v

CHIP



COLOR TEMPERATURE

3000K / 4000K / 5000K / 6500K

COLOR RENDERING INDEX

80Ra 90Ra

INSTALLATION

Surface Mounted 2600

STANDARDS & COMPLIANCES













Product Features:


Mini magnetic spot light, aluminum precision machining molding, surface electrostatic spraying process.

The integrated heat dissipation structure enables LED chip to dissipate heat rapidly, ensuring the average life of the light source can reach 50,000 hours. Can be divided to increase or decrease the number of lamp, choose the light color to meet different application environment, HQ LED cold light source, no radiation, no strobe, for the spectrum does not contain red, ultraviolet light, protect the subject.


AJT5F



DIMENSIONS (mm)



Illuminance Flow



DIMENSIONS (MM)

Wattages- 5 Watt Lumens- 400Lumens

Light Degree



POWERSUPPLY

DC 12v

CHIP



COLOR TEMPERATURE

3000K / 4000K / 5000K / 6500K

COLOR RENDERING INDEX

80Ra 90Ra

INSTALLATION

Surface Mounted 3600

STANDARDS & COMPLIANCES













Product Features:

Mini magnetic spot light, aluminum precision machining molding, surface electrostatic spraying process.

The integrated heat dissipation structure enables LED chip to dissipate heat rapidly, ensuring the average life of the light source can reach 50,000 hours. Can be divided to increase or decrease the number of lamp, choose the light color to meet different application environment, HQ LED cold light source, no radiation, no strobe, for the spectrum does not contain red, ultraviolet light, protect the subject.

AJT10FZ







15°/45



POWERSUPPLY

24v

CHIP



COLOR TEMPERATURE

3000K / 4000K / 5000K / 6500K

COLOR RENDERING INDEX

80Ra 90Ra

INSTALLATION

Surface Mounted Insert to the track

BODY COLOR:

STANDARDS & COMPLIANCES













DIMENSIONS (mm)



Illuminance Flow



Product Features:

Zoom spotlight for use in track lighting systems. The unique zoom patent makes it possible to vary the beam angel between 15-and 60 degrees making this model highly versatile, The Zoom spot is available in 2700 to 6000 Kelvin and is made from robust die-cast aluminum. Choose between on/off, phase cut and DALI dimming.

They are able to be used in plenty of applications such as retail stores, art galleries, residential areas, schools, museum, offices, hospitality and healthcare, etc.

One of unique advantage for such best rated Smarter track lighting lies in its flexible installations covening track-mounted.


AJT10FZ








DIMENSIONS (mm)



Illuminance Flow



DIMENSIONS (MM)

Wattages- 5 Watt Lumens- 400Lumens

Light Degree

15°/30°/45°







POWERSUPPLY

24v

CHIP



COLOR TEMPERATURE

3000K / 4000K / 5000K / 6500K

COLOR RENDERING INDEX

80Ra 90Ra

INSTALLATION

Surface Mounted Insert to the track

STANDARDS & COMPLIANCES













Product Features:

Zoom spotlight for use in track lighting systems. The unique zoom patent makes it possible to vary the beam angel between 15-and 60 degrees making this model highly versatile, The Zoom spot is available in 2700 to 6000 Kelvin and is made from robust die-cast aluminum. Choose between on/off, phase cut and DALI dimming.


They are able to be used in plenty of applications such as retail stores, art galleries, residential areas, schools, museum, offices, hospitality and healthcare, etc.

One of unique advantage for such best rated Smarter track lighting lies in its flexible installations covening track-mounted.


AJT3L



DIMENSIONS (mm)



Illuminance Flow





DIMENSIONS (MM)

Wattages- 5 Watt Lumens- 400Lumens

Light Degree

15°/30°/45°



POWERSUPPLY

DC 24v

CHIP



COLOR TEMPERATURE

3000K / 4000K / 5000K / 6500K

COLOR RENDERING INDEX

80Ra 90Ra

INSTALLATION

Surface Mounted Insert to the track

STANDARDS & COMPLIANCES









Product Features:


Mini magnetic spot light, aluminum precision machining molding, surface electrostatic spraying process.

The integrated heat dissipation structure enables LED chip to dissipate heat rapidly, ensuring the average life of the light source can reach 50,000 hours. Can be divided to increase or decrease the number of lamp, choose the light color to meet different application environment, HQ LED cold light source, no radiation, no strobe, for the spectrum does not contain red, ultraviolet light, protect the subject.


AJT5F



DIMENSIONS (mm)



Illuminance Flow





DIMENSIONS (MM)

Wattages- 1 Watt Lumens- 95Lumens

Light Degree

90°

POWERSUPPLY

DC 24v

CHIP



COLOR TEMPERATURE

3000K / 4000K / 5000K / 6500K

COLOR RENDERING INDEX

80Ra 90Ra

INSTALLATION

Surface Mounted Insert to the track

STANDARDS & COMPLIANCES





Product Features:


Mini magnetic spot light, aluminum precision machining molding, surface electrostatic spraying process.

The integrated heat dissipation structure enables LED chip to dissipate heat rapidly, ensuring the average life of the light source can reach 50,000 hours. Can be divided to increase or decrease the number of lamp, choose the light color to meet different application environment, HQ LED cold light source, no radiation, no strobe, for the spectrum does not contain red, ultraviolet light, protect the subject.


AJT3L



DIMENSIONS (mm)



Illuminance Flow



Wattages- 3 Watt Lumens- 240Lumens

DIMENSIONS (MM)

Light Degree



POWERSUPPLY

DC 24v

CHIP



COLOR TEMPERATURE

3000K / 4000K / 5000K / 6500K

COLOR RENDERING INDEX

80Ra 90Ra

INSTALLATION

Surface Mounted Insert to the track

BODY COLOR:

STANDARDS & COMPLIANCES














Product Features:


Mini magnetic spot light, aluminum precision machining molding, surface electrostatic spraying process.

The integrated heat dissipation structure enables LED chip to dissipate heat rapidly, ensuring the average life of the light source can reach 50,000 hours. Can be divided to increase or decrease the number of lamp, choose the light color to meet different application environment, HQ LED cold light source, no radiation, no strobe, for the spectrum does not contain red, ultraviolet light, protect the subject.


AJT5F

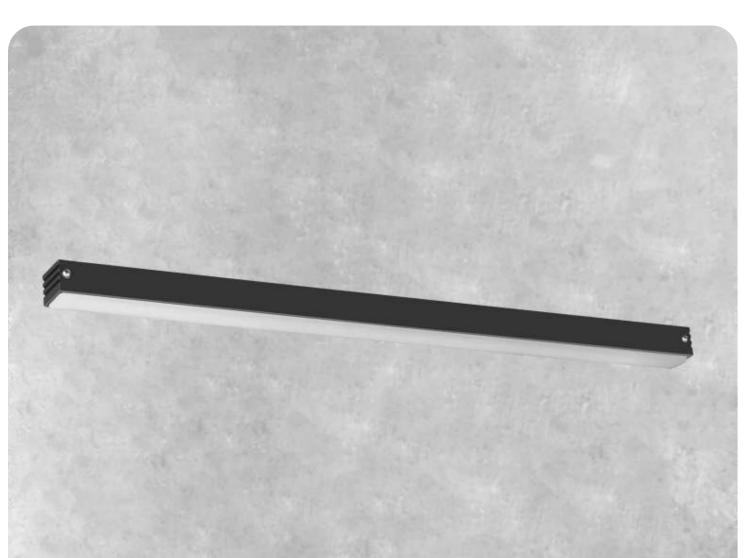

DIMENSIONS (mm)




Illuminance Flow



DIMENSIONS (MM)

Wattages- 3 Watt Lumens- 180Lumens

Light Degree



POWERSUPPLY

DC 24v

CHIP



COLOR TEMPERATURE

3000K / 4000K / 5000K / 6500K

COLOR RENDERING INDEX

80Ra 90Ra

INSTALLATION

Surface Mounted Insert to the track

STANDARDS & COMPLIANCES











Product Features:


Mini magnetic Linearlight, aluminum precision machining molding, surface electrostatic spraying process.

The integrated heat dissipation structure enables LED chip to dissipate heat rapidly, ensuring the average life of the light source can reach 50,000 hours. Can be divided to increase or decrease the number of lamp, choose the light color to meet different application environment, HQ LED cold light source, no radiation, no strobe, for the spectrum does not contain red, ultraviolet light, protect the subject.

AJT3L



DIMENSIONS (mm)

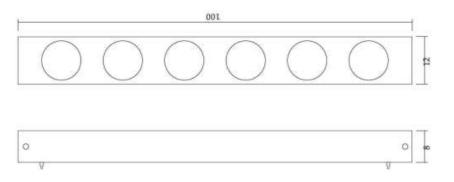



DIMENSIONS (MM)

Wattages- 3 Watt Lumens- 280Lumens

Light Degree

30°



POWERSUPPLY

DC 24v

CHIP



COLOR TEMPERATURE

3000K / 4000K / 5000K / 6500K

COLOR RENDERING INDEX

80Ra

90Ra

INSTALLATION

Insert to the track 2400

STANDARDS & COMPLIANCES













Product Features:

Mini magnetic spot light, aluminum precision machining molding, surface electrostatic spraying process.

The integrated heat dissipation structure enables LED chip to dissipate heat rapidly, ensuring the average life of the light source can reach 50,000 hours. Can be divided to increase or decrease the number of lamp, choose the light color to meet different application environment, HQ LED cold light source, no radiation, no strobe, for the spectrum does not contain red, ultraviolet light, protect the subject.







DIMENSIONS (MM)

Wattages- 6 Watt Lumens- 420Lumens

Light Degree



POWERSUPPLY

DC 24v

CHIP



COLOR TEMPERATURE

3000K / 4000K / 5000K / 6500K

COLOR RENDERING INDEX

80Ra 90Ra

INSTALLATION

Insert to the track

STANDARDS & COMPLIANCES

















DIMENSIONS (mm)

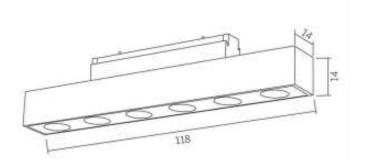

Illuminance Flow



Product Features:

Mini magnetic spot light, aluminum precision machining molding, surface electrostatic spraying process.

The integrated heat dissipation structure enables LED chip to dissipate heat rapidly, ensuring the average life of the light source can reach 50,000 hours. Can be divided to increase or decrease the number of lamp, choose the light color to meet different application environment, HQ LED cold light source, no radiation, no strobe, for the spectrum does not contain red, ultraviolet light, protect the subject.









Wattages- 12 Watt Lumens- 1000Lumens

Light Degree



POWERSUPPLY

12v/24v

CHIP



COLOR TEMPERATURE

3000K / 4000K / 5000K / 6500K

COLOR RENDERING INDEX

80Ra

90Ra

INSTALLATION

D-8000

STANDARDS & COMPLIANCES













DIMENSIONS (mm)

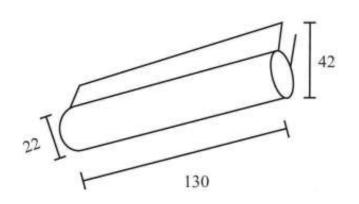

Illuminance Flow



Product Features:

Aluminum alloy precision molding, surface electrostatic spraying process.

Lights can move freely within the track, free positioning, arbitrarily change the position of lights, realize the great flexibility and adaptability.

Track is equipped with a security card clasp, more secure.

AJT1000F













DIMENSIONS (MM)

DC 12v - 24v

CHIP

COLOR TEMPERATURE

COLOR RENDERING INDEX

INSTALLATION

Insert to the track 1600

STANDARDS & COMPLIANCES












DIMENSIONS (mm)



Product Features:

Aluminum alloy precision molding, surface electrostatic spraying process.

Lights can move freely within the track, free positioning, arbitrarily change the position of lights, realize the great flexibility and adaptability.

Track is equipped with a security card clasp, more secure.








DIMENSIONS (mm)

Illuminance Flow



DIMENSIONS (MM)

POWERSUPPLY

DC 12v -24v

CHIP

COLOR TEMPERATURE

COLOR RENDERING INDEX

INSTALLATION

The Track 2400

STANDARDS & COMPLIANCES










Product Features:


Aluminum alloy precision molding, surface electrostatic spraying process.

Lights can move freely within the track, free positioning, arbitrarily change the position of lights, realize the great flexibility and adaptability.


Track is equipped with a security card clasp, more secure.

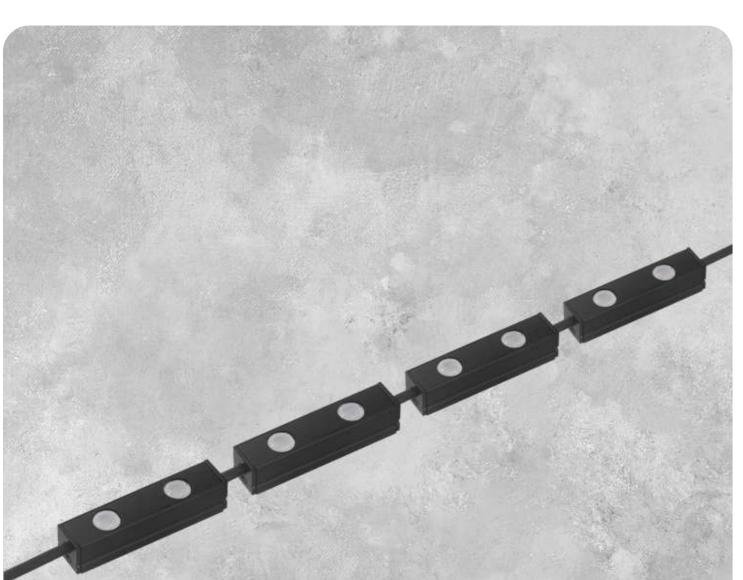

DIMENSIONS (mm)

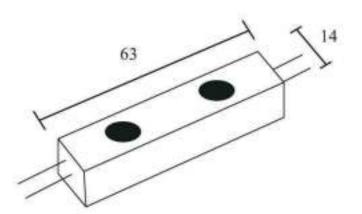

Illuminance Flow



AJC4D

DIMENSIONS (MM)

Wattages- 4 Watt Lumens- 180Lumens

Light Degree



POWERSUPPLY

24v

CHIP



COLOR TEMPERATURE

3000K / 4000K / 5000K / 6500K

COLOR RENDERING INDEX

80Ra

90Ra

INSTALLATION

1000 per pc

STANDARDS & COMPLIANCES















Product Features:


Mini magnetic spot light, aluminum precision machining molding, surface electrostatic spraying process.

The integrated heat dissipation structure enables LED chip to dissipate heat rapidly, ensuring the average life of the light source can reach 50,000 hours. Can be divided to increase or decrease the number of lamp, choose the light color to meet different application environment, HQ LED cold light source, no radiation, no strobe, for the spectrum does not contain red, ultraviolet light, protect the subject.


AJT5F





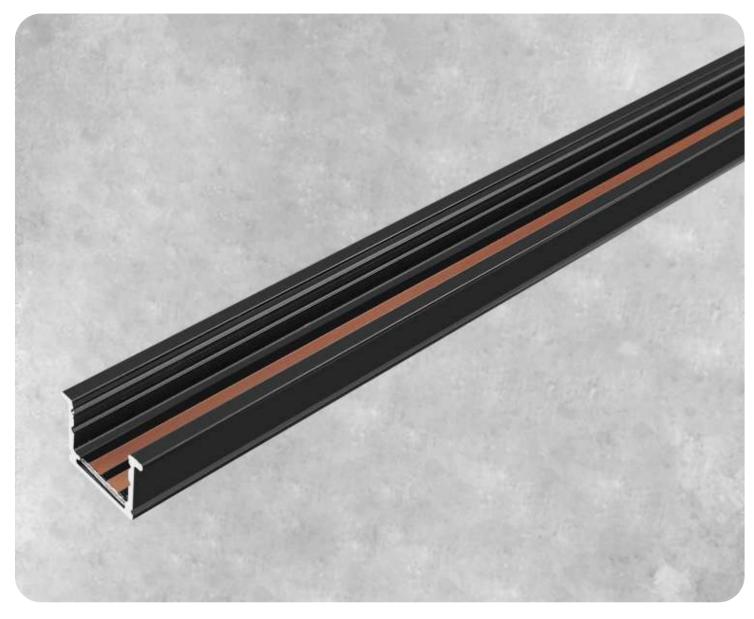

DIMENSIONS (mm)



Illuminance Flow

POWERSUPPLY

DIMENSIONS (MM)

12v/24v

CHIP

COLOR TEMPERATURE

COLOR RENDERING INDEX

INSTALLATION

Concealed

STANDARDS & COMPLIANCES






Product Features:

Aluminum alloy precision molding, surface electrostatic spraying process.


Lights can move freely within the track, free positioning, arbitrarily change the position of lights, realize the great flexibility and adaptability.

Track is equipped with a security card clasp, more secure.

AJS5LM

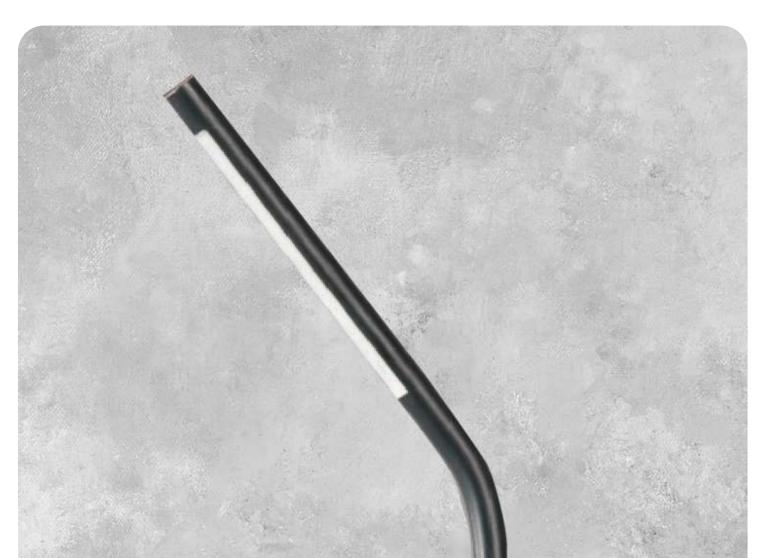

DIMENSIONS (mm)

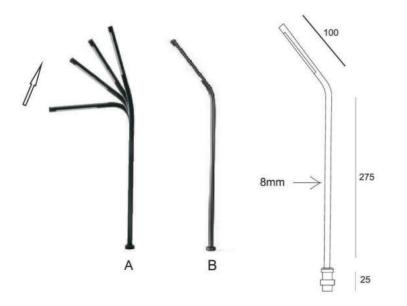



DIMENSIONS (MM)

Wattages- 5 Watt Lumens- 300Lumens

Light Degree

120°



POWERSUPPLY

DRIVER

CHIP



COLOR TEMPERATURE

3000K / 4000K / 5000K / 6500K

COLOR RENDERING INDEX

80Ra

90Ra

INSTALLATION

3000

STANDARDS & COMPLIANCES













Product Features:

Profession design for jewelry lighting

Use this light in glass display showcases and jewelry showcase is perfect.

The Post Spot is a simple, easy to install product with plug and play connection to the power Supply and will illuminate your displays for years to come.

Showcase lights are used to light up products kept in a display showcase in a showroom.

These lights are placed very close to the product and point directly at the then thus, and they light up them in the best possible manner.

AJS4D0





DIMENSIONS (MM)

Wattages- 4 Watt Lumens- 350Lumens

Light Degree

15°/ 25°/ 30°



POWERSUPPLY

Driver

CHIP



COLOR TEMPERATURE

3000K / 4000K / 5000K / 6500K

COLOR RENDERING INDEX

80Ra

90Ra

INSTALLATION

-3600

STANDARDS & COMPLIANCES















DIMENSIONS (mm)



Illuminance Flow



Product Features:

Profession design for jewelry lighting

Use this light in glass display showcases and jewelry showcase is perfect.

The Post Spot is a simple, easy to install product with plug and play connection to the power Supply and will illuminate your displays for years to come.

Showcase lights are used to light up products kept in a display showcase in a showroom.

These lights are placed very close to the product and point directly at the then thus, and they

light up them in the best possible manner.

AJSIDOC





15°/ 25°/ 30°



POWERSUPPLY

Driver

CHIP



COLOR TEMPERATURE

3000K / 4000K / 5000K / 6500K

COLOR RENDERING INDEX

80Ra

90Ra

INSTALLATION

2000

STANDARDS & COMPLIANCES
















DIMENSIONS (mm)



Illuminance Flow



Product Features:

Profession design for jewelry lighting

Use this light in glass display showcases and jewelry showcase is perfect.

The Post Spot is a simple, easy to install product with plug and play connection to the power Supply and will illuminate your displays for years to come.

Showcase lights are used to light up products kept in a display showcase in a showroom.

These lights are placed very close to the product and point directly at the then thus, and they light up them in the best possible manner.



Lumens- 300Lumens

Light Degree



CHIP



COLOR TEMPERATURE

90Ra

INSTALLATION

2900

STANDARDS & COMPLIANCES













Product Features:

Profession design for jewelry lighting


Use this light in glass display showcases and jewelry showcase is perfect.

The Post Spot is a simple, easy to install product with plug and play connection to the power Supply and will illuminate your displays for years to come.


Showcase lights are used to light up products kept in a display showcase in a showroom These lights are placed very close to the product and point directly at the then thus, and they light up them in the best possible manner.



DIMENSIONS (mm)



Illuminance Flow



AJS3D0C

Wattages- 3 Watt

POWERSUPPLY

Driver



3000K / 4000K / 5000K / 6500K

COLOR RENDERING INDEX

80Ra

AJS2CH







Wattages- Single Spot Lumens- Double Spot 2.5w

Light Degree

30°



POWERSUPPLY

24v

CHIP



COLOR TEMPERATURE

3000K / 4000K / 5000K / 6500K

COLOR RENDERING INDEX

80Ra

90Ra

INSTALLATION

Surface Mounted 2200

STANDARDS & COMPLIANCES















DIMENSIONS (mm)



Illuminance Flow



Product Features:

Profession design for jewelry lighting

Use this light in glass display showcases and jewelry showcase is perfect.

The Post Spot is a simple, easy to install product with plug and play connection to the power Supply and will illuminate your displays for years to come.

Showcase lights are used to light up products kept in a display showcase in a showroom.

These lights are placed very close to the product and point directly at the then thus, and they

light up them in the best possible manner.

AJS3NM







Wattages- 3 Watt Lumens- 165 Lumens

Light Degree



POWERSUPPLY

Driver

CHIP



COLOR TEMPERATURE

3000K / 4000K / 5000K / 6500K

COLOR RENDERING INDEX

80Ra 90Ra

INSTALLATION

Surface Mounted 4000

BODY COLOR:

STANDARDS & COMPLIANCES













DIMENSIONS (mm)



Illuminance Flow



Product Features:

Profession design for jewelry lighting

Black

Use this light in glass display showcases and jewelry showcase is perfect.


The Post Spot is a simple, easy to install product with plug and play connection to the power Supply and will illuminate your displays for years to come.

Showcase lights are used to light up products kept in a display showcase in a showroom These lights are placed very close to the product and point directly at the then thus, and they light up them in the best possible manner.


AJSIMM






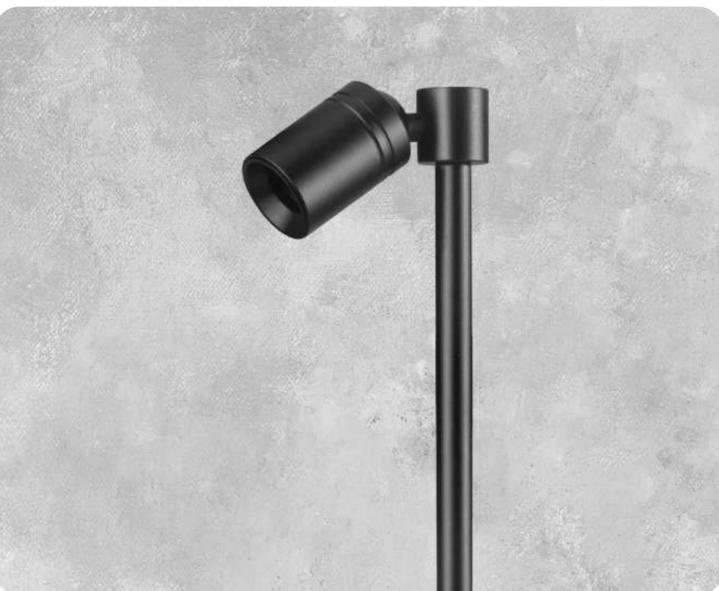

DIMENSIONS (mm)



Illuminance Flow



DIMENSIONS (MM)

Wattages- 1 Watt Lumens- 110 Lumens

Light Degree

30°



POWERSUPPLY

Driver

CHIP



COLOR TEMPERATURE

3000K / 4000K / 5000K / 6500K

COLOR RENDERING INDEX

80Ra

90Ra

INSTALLATION

-2400

STANDARDS & COMPLIANCES













Product Features:

Profession design for jewelry lighting

Use this light in glass display showcases and jewelry showcase is perfect.

The Post Spot is a simple, easy to install product with plug and play connection to the power Supply and will illuminate your displays for years to come.

Showcase lights are used to light up products kept in a display showcase in a showroom

These lights are placed very close to the product and point directly at the then thus, and they light up them in the best possible manner.

AJS3NM








30°



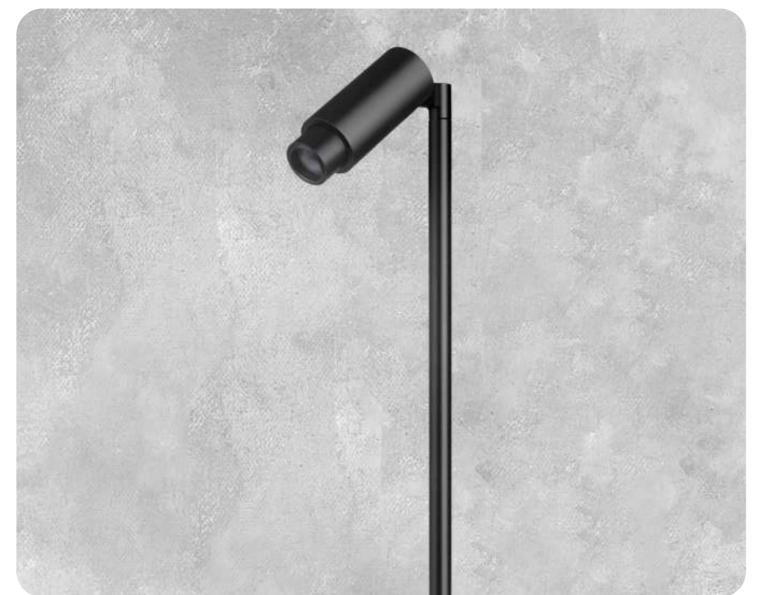

POWERSUPPLY

Driver

CHIP



COLOR TEMPERATURE

3000K / 4000K / 5000K / 6500K

COLOR RENDERING INDEX

80Ra

90Ra

INSTALLATION

Surface Mounted

STANDARDS & COMPLIANCES












DIMENSIONS (mm)



Illuminance Flow



Product Features:

Profession design for jewelry lighting

Use this light in glass display showcases and jewelry showcase is perfect.

The Post Spot is a simple, easy to install product with plug and play connection to the power Supply and will illuminate your displays for years to come.

Showcase lights are used to light up products kept in a display showcase in a showroom.


These lights are placed very close to the product and point directly at the then thus, and they








DIMENSIONS (mm)



Illuminance Flow



DIMENSIONS (MM)

Wattages- 6 Watt Lumens- 600 Lumens

Light Degree

25°/30°



POWERSUPPLY

Driver

CHIP



COLOR TEMPERATURE

3000K / 4000K / 5000K / 6500K

COLOR RENDERING INDEX

80Ra 90Ra

INSTALLATION

Surface Mounted 3000

STANDARDS & COMPLIANCES











Product Features:


Profession design for jewelry lighting

Use this light in glass display showcases and jewelry showcase is perfect.


The Post Spot is a simple, easy to install product with plug and play connection to the power Supply and will illuminate your displays for years to come.

Showcase lights are used to light up products kept in a display showcase in a showroom These lights are placed very close to the product and point directly at the then thus, and they light up them in the best possible manner.


AJS3D0

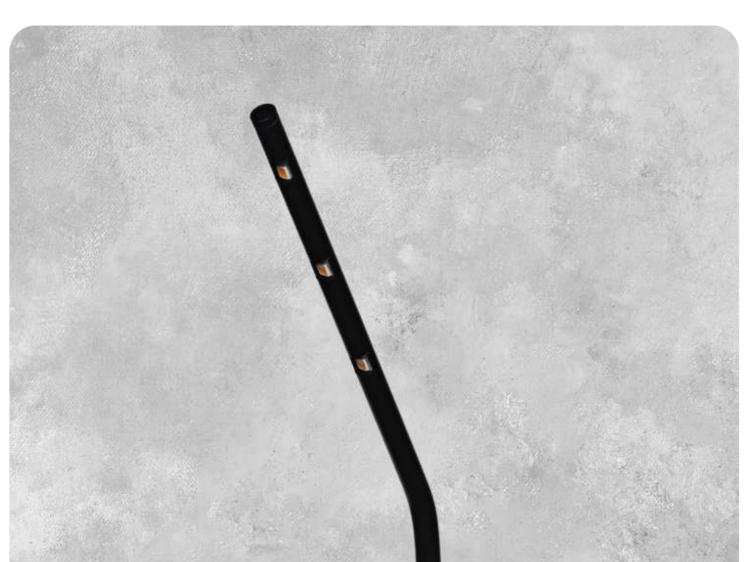

DIMENSIONS (mm)



Illuminance Flow



DIMENSIONS (MM)

Wattages- 3 Watt Lumens- 300 Lumens

Light Degree

120°



POWERSUPPLY

Driver

CHIP



COLOR TEMPERATURE

3000K / 4000K / 5000K / 6500K

COLOR RENDERING INDEX

80Ra 90Ra

INSTALLATION

Surface Mounted 1900

STANDARDS & COMPLIANCES











Product Features:

Profession design for jewelry lighting

light up them in the best possible manner.

Use this light in glass display showcases and jewelry showcase is perfect.

The Post Spot is a simple, easy to install product with plug and play connection to the power Supply and will illuminate your displays for years to come.

Showcase lights are used to light up products kept in a display showcase in a showroom These lights are placed very close to the product and point directly at the then thus, and they

AJS2PDO







Wattages- 2 Watt Lumens- 300 Lumens

Light Degree

15°



POWERSUPPLY

Driver

CHIP



COLOR TEMPERATURE

3000K / 4000K / 5000K / 6500K

COLOR RENDERING INDEX

80Ra 90Ra

INSTALLATION

Surface Mounted 1900

STANDARDS & COMPLIANCES















DIMENSIONS (mm)



Illuminance Flow



Product Features:

Profession design for jewelry lighting

Use this light in glass display showcases and jewelry showcase is perfect.

The Post Spot is a simple, easy to install product with plug and play connection to the power Supply and will illuminate your displays for years to come.

Showcase lights are used to light up products kept in a display showcase in a showroom.

These lights are placed very close to the product and point directly at the then thus, and they light up them in the best possible manner.

AJSIMDI







Light Degree

15° / 30° / 45°



POWERSUPPLY

Driver

CHIP



COLOR TEMPERATURE

3000K / 4000K / 5000K / 6500K

COLOR RENDERING INDEX

80Ra 90Ra

INSTALLATION

Surface Mounted 1000

STANDARDS & COMPLIANCES













DIMENSIONS (mm) Illuminance Flow





Product Features:

Profession design for jewelry lighting

Use this light in glass display showcases and jewelry showcase is perfect.

The Post Spot is a simple, easy to install product with plug and play connection to the power Supply and will illuminate your displays for years to come.

Showcase lights are used to light up products kept in a display showcase in a showroom These lights are placed very close to the product and point directly at the then thus, and they light up them in the best possible manner.

AJS3ED1







Wattages- 3 Watt Lumens- 300 Lumens **Light Degree**

30°



POWERSUPPLY

Driver

CHIP



COLOR TEMPERATURE

3000K / 4000K / 5000K / 6500K

COLOR RENDERING INDEX

80Ra 90Ra

INSTALLATION

Surface Mounted 1900

STANDARDS & COMPLIANCES















DIMENSIONS (mm)

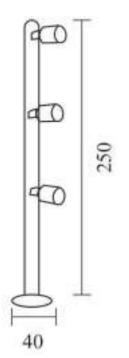

Illuminance Flow



Product Features:

Profession design for jewelry lighting

light up them in the best possible manner.


Use this light in glass display showcases and jewelry showcase is perfect.

The Post Spot is a simple, easy to install product with plug and play connection to the power Supply and will illuminate your displays for years to come.


Showcase lights are used to light up products kept in a display showcase in a showroom.

These lights are placed very close to the product and point directly at the then thus, and they

AJS3D0

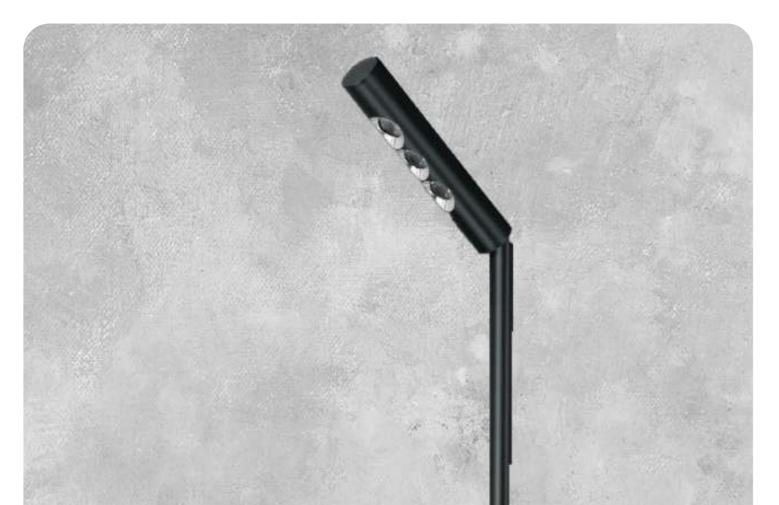

DIMENSIONS (mm)

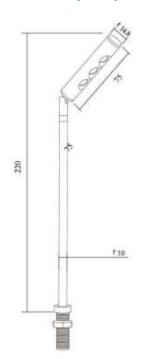

DIMENSIONS (MM)

Wattages- 3*1 Watt Lumens- 280 Lumens

Light Degree



POWERSUPPLY

Driver

CHIP



COLOR TEMPERATURE

3000K / 4000K / 5000K / 6500K

COLOR RENDERING INDEX

80Ra

90Ra

INSTALLATION

Surface Mounted 3000

STANDARDS & COMPLIANCES















Product Features:

Made of high quality LED light source, exquisite appearance, smooth texture, precision optical design, create a fruity, full incomparable perfect light type. Spectrum contains no red, uv, protection is according

to the content, do not contain harmful substances mercury, caring human body health, protect the environment. Diversified product range, can choose suitable products according to the different environmental needs.







Wattages- 3 Watt Lumens- 165 Lumens **Light Degree**

10° / 25° / 45° / 60°

POWERSUPPLY

Driver

CHIP



COLOR TEMPERATURE

3000K / 4000K / 5000K / 6500K

COLOR RENDERING INDEX

80Ra

90Ra

INSTALLATION

Surface Mounted

STANDARDS & COMPLIANCES











Product Features:


Profession design for jewelry lighting

Use this light in glass display showcases and jewelry showcase is perfect.


The Post Spot is a simple, easy to install product with plug and play connection to the power Supply and will illuminate your displays for years to come.

Showcase lights are used to light up products kept in a display showcase in a showroom These lights are placed very close to the product and point directly at the then thus, and they


light up them in the best possible manner.

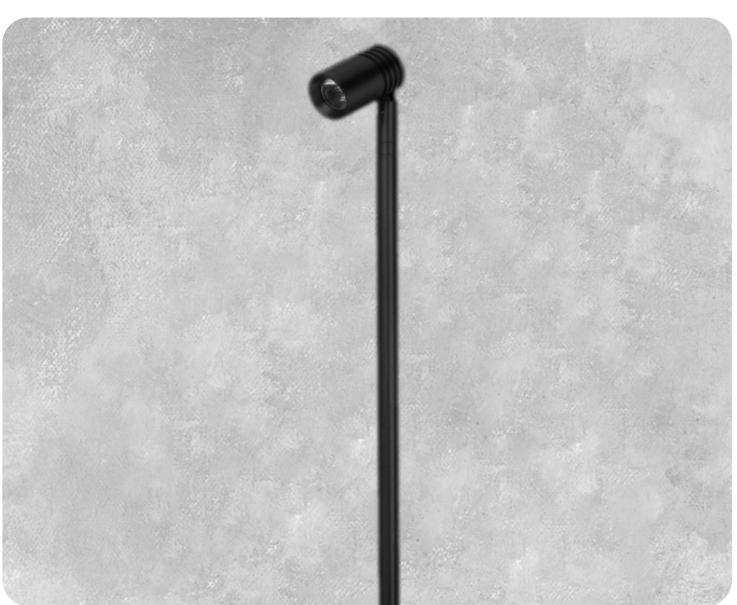

DIMENSIONS (mm)



Illuminance Flow









Wattages- 3 Watt Lumens- 165 Lumens

Light Degree

30°



POWERSUPPLY

12W/24W

CHIP

COLOR TEMPERATURE

COLOR RENDERING INDEX

INSTALLATION

surface

STANDARDS & COMPLIANCES











DIMENSIONS (mm)



Illuminance Flow

Product Features:

Aluminum alloy precision molding, surface electrostatic spraying process.


Lights can move freely within the track, free positioning, arbitrarily change the position of lights, realize the great flexibility and adaptability.

Track is equipped with a security card clasp, more secure.


AJT2DP



DIMENSIONS (mm)



Illuminance Flow





DIMENSIONS (MM)

Wattages- 2 Watt Lumens- 150 Lumens

Light Degree

15° / 30° / 25°



POWERSUPPLY

24v -12v

CHIP



COLOR TEMPERATURE

3000K / 4000K / 5000K / 6500K

COLOR RENDERING INDEX

80Ra

90Ra

INSTALLATION

Insert to the track

ND- 3600

D- 4600

STANDARDS & COMPLIANCES













Product Features:


Mini magnetic spot light, aluminum precision machining molding, surface electrostatic spraying process.

The integrated heat dissipation structure enables LED chip to dissipate heat rapidly, ensuring the average life of the light source can reach 50,000 hours. Can be divided to increase or decrease the number of lamp, choose the light color to meet different application environment, HQ LED cold light source, no radiation, no strobe, for the spectrum does not contain red, ultraviolet light, protect the subject.


AJT3X1DP



DIMENSIONS (mm)



Illuminance Flow





DIMENSIONS (MM)

Wattages- 3.5 Watt Lumens- 300 Lumens

Light Degree



POWERSUPPLY

24v -12v

CHIP



COLOR TEMPERATURE

3000K / 4000K / 5000K / 6500K

COLOR RENDERING INDEX

80Ra

90Ra

INSTALLATION

Insert to the track 5000

STANDARDS & COMPLIANCES













Product Features:


Mini magnetic spot light, aluminum precision machining molding, surface electrostatic spraying process.

The integrated heat dissipation structure enables LED chip to dissipate heat rapidly, ensuring the average life of the light source can reach 50,000 hours. Can be divided to increase or decrease the number of lamp, choose the light color to meet different application environment, HQ LED cold light source, no radiation, no strobe, for the spectrum does not contain red, ultraviolet light, protect the subject.


AJT6ZDP



DIMENSIONS (mm)



Illuminance Flow





DIMENSIONS (MM)

Wattages- 3/5 Watt Lumens- 250 Lumens

Light Degree



POWERSUPPLY

24v -12v

CHIP



COLOR TEMPERATURE

3000K / 4000K / 5000K / 6500K

COLOR RENDERING INDEX

80Ra

90Ra

INSTALLATION

Insert to the track 3W-D6400

6W-D6600

BODY COLOR:

STANDARDS & COMPLIANCES














Product Features:

Mini magnetic spot light, aluminum precision machining molding, surface electrostatic spraying process.


The integrated heat dissipation structure enables LED chip to dissipate heat rapidly, ensuring the average life of the light source can reach 50,000 hours. Can be divided to increase or decrease the number of lamp, choose the light color to meet different application environment, HQ LED cold light source, no radiation, no strobe, for the spectrum does not contain red, ultraviolet light, protect the subject.



DIMENSIONS (mm)



Illuminance Flow



AJT3ZDP



DIMENSIONS (MM)

Wattages- 3 Watt Lumens- 250 Lumens

POWERSUPPLY

24v -12v

CHIP



COLOR TEMPERATURE

3000K / 4000K / 5000K / 6500K

COLOR RENDERING INDEX

80Ra 90Ra

INSTALLATION

Insert to the track 5400

STANDARDS & COMPLIANCES













Product Features:


Mini magnetic spot light, aluminum precision machining molding, surface electrostatic spraying process.

The integrated heat dissipation structure enables LED chip to dissipate heat rapidly, ensuring the average life of the light source can reach 50,000 hours. Can be divided to increase or decrease the number of lamp, choose the light color to meet different application environment, HQ LED cold light source, no radiation, no strobe, for the spectrum does not contain red, ultraviolet light, protect the subject.


AJT5DP



DIMENSIONS (mm)



Illuminance Flow



DIMENSIONS (MM)

Light Degree 15° / 30° / 45°

Wattages- 5 Watt Lumens- 400 Lumens



POWERSUPPLY

24v -12v

CHIP



COLOR TEMPERATURE

3000K / 4000K / 5000K / 6500K

COLOR RENDERING INDEX

80Ra 90Ra

INSTALLATION

Insert to the track 5900

STANDARDS & COMPLIANCES











Product Features:


Mini magnetic spot light, aluminum precision machining molding, surface electrostatic spraying process.

The integrated heat dissipation structure enables LED chip to dissipate heat rapidly, ensuring the average life of the light source can reach 50,000 hours. Can be divided to increase or decrease the number of lamp, choose the light color to meet different application environment, HQ LED cold light source, no radiation, no strobe, for the spectrum does not contain red, ultraviolet light, protect the subject.


AJTL6



DIMENSIONS (mm)

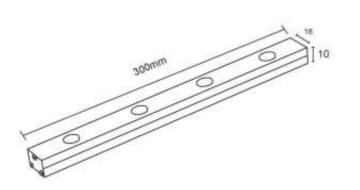

Illuminance Flow





DIMENSIONS (MM)

Wattages- 6 Watt Lumens- 600 Lumens

Light Degree

15° / 30° / 45°



POWERSUPPLY

24v

CHIP



COLOR TEMPERATURE

3000K / 4000K / 5000K / 6500K

COLOR RENDERING INDEX

80Ra 90Ra

INSTALLATION

Insert to the track 6000

STANDARDS & COMPLIANCES

BODY COLOR:









Product Features:

Mini magnetic spot light, aluminum precision machining molding, surface electrostatic spraying process.

The integrated heat dissipation structure enables LED chip to dissipate heat rapidly, ensuring the average life of the light source can reach 50,000 hours. Can be divided to increase or decrease the number of lamp, choose the light color to meet different application environment, HQ LED cold light source, no radiation, no strobe, for the spectrum does not contain red, ultraviolet light, protect the subject.








DIMENSIONS (mm)

Illuminance Flow

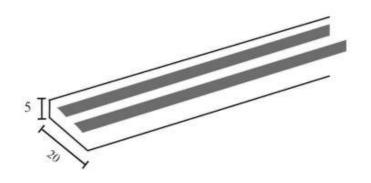

DIMENSIONS (MM)

POWERSUPPLY

DC 12v - 24v

CHIP



COLOR TEMPERATURE

COLOR RENDERING INDEX

INSTALLATION

The Track 2400

STANDARDS & COMPLIANCES











Product Features:

Aluminum alloy precision molding, surface electrostatic spraying process.

Lights can move freely within the track, free positioning, arbitrarily change the position of lights, realize the great flexibility and adaptability.

Track is equipped with a security card clasp, more secure.

The lights can be placed in any position of lamps and lanterns and adjust at any time..

AJT100₩








DIMENSIONS (mm)

Illuminance Flow



DIMENSIONS (MM)

POWERSUPPLY

DC 12v -24v

CHIP



COLOR TEMPERATURE

COLOR RENDERING INDEX

INSTALLATION

The Track 3000

STANDARDS & COMPLIANCES









Product Features:

Aluminum alloy precision molding, surface electrostatic spraying process.

Lights can move freely within the track, free positioning, arbitrarily change the position of lights, realize the great flexibility and adaptability.


Track is equipped with a security card clasp, more secure.

The lights can be placed in any position of lamps and lanterns and adjust at any time..


AJT3S



DIMENSIONS (mm)



Illuminance Flow





Light Degree

25°



DIMENSIONS (MM)

Wattages- 3 Watt Lumens- 250 Lumens

POWERSUPPLY

DC 24v

CHIP



COLOR TEMPERATURE

3000K / 4000K / 5000K / 6500K

COLOR RENDERING INDEX

80Ra 90Ra

30110

INSTALLATION

Insert to the track 2000

STANDARDS & COMPLIANCES













Product Features:


Mini magnetic spot light, aluminum precision machining molding, surface electrostatic spraying process.

The integrated heat dissipation structure enables LED chip to dissipate heat rapidly, ensuring the average life of the light source can reach 50,000 hours. Can be divided to increase or decrease the number of lamp, choose the light color to meet different application environment, HQ LED cold light source, no radiation, no strobe, for the spectrum does not contain red, ultraviolet light, protect the subject.


AJTIN



DIMENSIONS (mm)

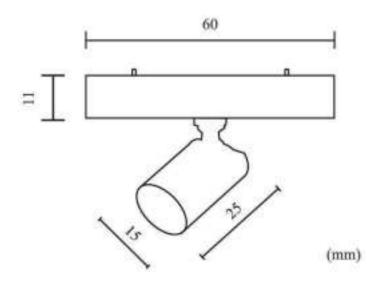

Illuminance Flow





DIMENSIONS (MM)

Wattages- 1 Watt Lumens- 120 Lumens

Light Degree

30°



POWERSUPPLY

24v to 12v

CHIP



COLOR TEMPERATURE

3000K / 4000K / 5000K / 6500K

COLOR RENDERING INDEX

80Ra 90Ra

INSTALLATION

Insert to the track 1800

STANDARDS & COMPLIANCES







Product Features:

Mini magnetic spot light, aluminum precision machining molding, surface electrostatic spraying process.

The integrated heat dissipation structure enables LED chip to dissipate heat rapidly, ensuring the average life of the light source can reach 50,000 hours. Can be divided to increase or decrease the number of lamp, choose the light color to meet different application environment, HQ LED cold light source, no radiation, no strobe, for the spectrum does not contain red, ultraviolet light, protect the subject.







DIMENSIONS (MM)

Wattages- 3 Watt Lumens- 180 Lumens

Light Degree



POWERSUPPLY

DC 12v -24v

CHIP



COLOR TEMPERATURE

3000K / 4000K / 5000K / 6500K

COLOR RENDERING INDEX

80Ra 90Ra

INSTALLATION

Insert to the track 2700

STANDARDS & COMPLIANCES















Illuminance Flow



60

(mm)

Product Features:

Mini magnetic spot light, aluminum precision machining molding, surface electrostatic spraying process.

The integrated heat dissipation structure enables LED chip to dissipate heat rapidly, ensuring the average life of the light source can reach 50,000 hours. Can be divided to increase or decrease the number of lamp, choose the light color to meet different application environment, HQ LED cold light source, no radiation, no strobe, for the spectrum does not contain red, ultraviolet light, protect the subject.

Suitable for jewelry, jewelry, clocks, antiques and other display cabinets, display small space as the key lighting.

DIM

AJTIS





80°





Lorrieris 100 Lorrier

POWERSUPPLY

DC 12v -24v

CHIP



COLOR TEMPERATURE

3000K / 4000K / 5000K / 6500K

COLOR RENDERING INDEX

80Ra

90Ra

INSTALLATION

Insert to the track 1600

STANDARDS & COMPLIANCES

















DIMENSIONS (mm)



Illuminance Flow



Product Features:

Mini magnetic spot light, aluminum precision machining molding, surface electrostatic spraying process.

The integrated heat dissipation structure enables LED chip to dissipate heat rapidly, ensuring the average life of the light source can reach 50,000 hours. Can be divided to increase or decrease the number of lamp, choose the light color to meet different application environment, HQ LED cold light source, no radiation, no strobe, for the spectrum does not contain red, ultraviolet light, protect the subject.

AJT1000S









DIMENSIONS (MM)

POWERSUPPLY

DC 24v

CHIP



COLOR TEMPERATURE

COLOR RENDERING INDEX

INSTALLATION

TRACK 1600

STANDARDS & COMPLIANCES













Product Features:

Aluminum alloy precision molding, surface electrostatic spraying process.

Lights can move freely within the track, free positioning, arbitrarily change the position of lights, realize the great flexibility and adaptability.


Track is equipped with a security card clasp, more secure.

The lights can be placed in any position of lamps and lanterns and adjust at any time..


AJT3N



DIMENSIONS (mm)



Illuminance Flow





DIMENSIONS (MM)

Wattages- 3 Watt Lumens- 300 Lumens

Light Degree



POWERSUPPLY

12V & 24v

CHIP



COLOR TEMPERATURE

3000K / 4000K / 5000K / 6500K

COLOR RENDERING INDEX

80Ra 90Ra

INSTALLATION

Insert to the track 1300

STANDARDS & COMPLIANCES














Product Features:


Mini magnetic spot light, aluminum precision machining molding, surface electrostatic spraying process.

The integrated heat dissipation structure enables LED chip to dissipate heat rapidly, ensuring the average life of the light source can reach 50,000 hours. Can be divided to increase or decrease the number of lamp, choose the light color to meet different application environment, HQ LED cold light source, no radiation, no strobe, for the spectrum does not contain red, ultraviolet light, protect the subject.


AJT5MN

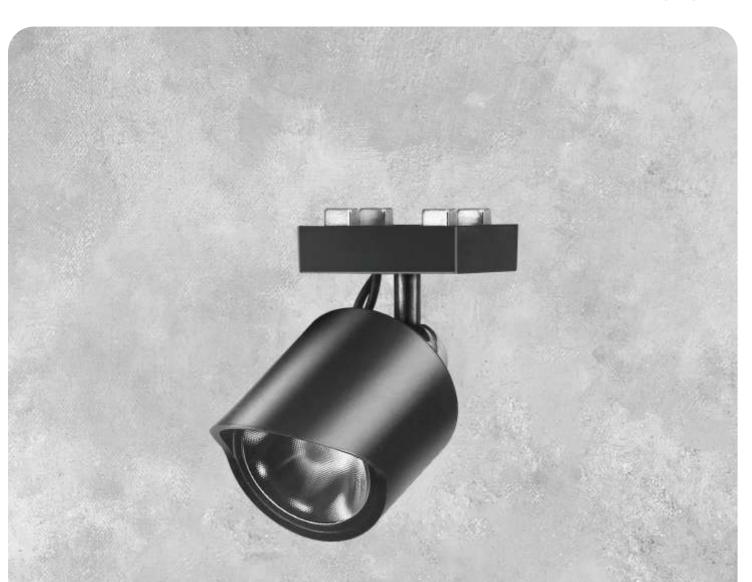

DIMENSIONS (mm)



Illuminance Flow







DIMENSIONS (MM)

Wattages- 5 Watt Lumens- 420 Lumens

Light Degree

15° / 30° / 45°



POWERSUPPLY

DC12v/DC24v

CHIP



COLOR TEMPERATURE

3000K / 4000K / 5000K / 6500K

COLOR RENDERING INDEX

80Ra

90Ra

INSTALLATION

Insert to the track 3000

STANDARDS & COMPLIANCES













Product Features:


Mini magnetic spot light, aluminum precision machining molding, surface electrostatic spraying process.

The integrated heat dissipation structure enables LED chip to dissipate heat rapidly, ensuring the average life of the light source can reach 50,000 hours. Can be divided to increase or decrease the number of lamp, choose the light color to meet different application environment, HQ LED cold light source, no radiation, no strobe, for the spectrum does not contain red, ultraviolet light, protect the subject.


AJT3MN



DIMENSIONS (mm)



Illuminance Flow



DIMENSIONS (MM)

Wattages- 3 Watt Lumens- 165 Lumens

Light Degree



POWERSUPPLY

DC12v/DC24v

CHIP



COLOR TEMPERATURE

3000K / 4000K / 5000K / 6500K

COLOR RENDERING INDEX

80Ra 90Ra

INSTALLATION

Insert to the track 2600

STANDARDS & COMPLIANCES













Product Features:


Mini magnetic spot light, aluminum precision machining molding, surface electrostatic spraying process.

The integrated heat dissipation structure enables LED chip to dissipate heat rapidly, ensuring the average life of the light source can reach 50,000 hours. Can be divided to increase or decrease the number of lamp, choose the light color to meet different application environment, HQ LED cold light source, no radiation, no strobe, for the spectrum does not contain red, ultraviolet light, protect the subject.


AJS3X1DP



DIMENSIONS (mm)



Illuminance Flow





DIMENSIONS (MM)

Wattages- 3 Watt Lumens- 300 Lumens

Light Degree

15° / 30° / 45°



POWERSUPPLY

Driver

CHIP



COLOR TEMPERATURE

3000K / 4000K / 5000K / 6500K

COLOR RENDERING INDEX

80Ra 90Ra

INSTALLATION

Surface Mounted 4000

STANDARDS & COMPLIANCES













Product Features:

Mini conceal spot light, aluminum precision machining molding, surface electrostatic spraying process.

The integrated heat dissipation structure enables LED chip to dissipate heat rapidly, ensuring the average life of the light source can reach 50,000 hours. Can be divided to increase or decrease the number of lamp, choose the light color to meet different application environment, HQ LED cold light source, no radiation, no strobe, for the spectrum does not contain red, ultraviolet light, protect the subject.

AJM360D







Lumens- 80 Lumens

15° / 30° / 45°



Light Degree

POWERSUPPLY

Driver

CHIP



COLOR TEMPERATURE

3000K / 4000K / 5000K / 6500K

COLOR RENDERING INDEX

80Ra

90Ra

INSTALLATION

Surface Mounted

BODY COLOR:

STANDARDS & COMPLIANCES












Product Features:


Adopt the super mini design, high quality LED chips, efficient optical technology, anti-dazzle design, excellent thermal management and a variety of color temperature, dedicated to the pavilion, the museum exhibition space, such as display ark, clothes closet and other places, have the effect of accent lighting.



DIMENSIONS (mm)



Illuminance Flow




AJM360D








DIMENSIONS (mm)



Illuminance Flow



DIMENSIONS (MM)

Wattages- 1 Watt Lumens- 120 Lumens

Light Degree

30°



POWERSUPPLY

1w & 3w

CHIP



COLOR TEMPERATURE

3000K / 4000K / 5000K / 6500K

COLOR RENDERING INDEX

80Ra 90Ra

INSTALLATION

Surface Mounted 1w 600 3w 700

STANDARDS & COMPLIANCES





Product Features:


Adopt the super mini design, high quality LED chips, efficient optical technology, anti-dazzle design, excellent thermal management and a variety of color temperature, dedicated to the pavilion, the museum exhibition space, such as display ark, clothes closet and other places, have the effect of accent lighting.








DIMENSIONS (mm)



Illuminance Flow



DIMENSIONS (MM)

Wattages- 3 Watt Lumens- 300 Lumens

Light Degree

15° / 30° / 25°



POWERSUPPLY

Driver

CHIP



COLOR TEMPERATURE

3000K / 4000K / 5000K / 6500K

COLOR RENDERING INDEX

80Ra 90Ra

INSTALLATION

Recessed 1100

STANDARDS & COMPLIANCES

BODY COLOR:









Product Features:

360 Movable body with power led, high brightness and durable quality.

Anodized silver & black shell finish ant-rust, antioxidant. The light can be adjusted.

AJC2M



Light Degree

15° / 30° / 25°



Wattages- 1 Watt Lumens- 95 Lumens

POWERSUPPLY

Driver

CHIP



COLOR TEMPERATURE

3000K / 4000K / 5000K / 6500K

COLOR RENDERING INDEX

80Ra

90Ra

INSTALLATION

Recessed

STANDARDS & COMPLIANCES

BODY COLOR:













DIMENSIONS (mm)



Illuminance Flow



Product Features:

Mini body with power led, high brightness and durable quality.

Anodized silver & black shell finish ant-rust, antioxidant. The light can be adjusted.


AJC12CY








DIMENSIONS (mm)



Illuminance Flow



DIMENSIONS (MM)

Wattages- 1 Watt Lumens- 120 Lumens

Light Degree

60°



POWERSUPPLY

12v

CHIP



COLOR TEMPERATURE

3000K / 4000K / 5000K / 6500K

COLOR RENDERING INDEX

80Ra 90Ra

INSTALLATION

Recessed 300

STANDARDS & COMPLIANCES















Product Features:

Mini body with SMD LED with lens, high brightness and durable quality.

Anodized silver & black shell finish ant-rust, antioxidant.

AJC3DP



Wattages- 3 Watt Lumens- 280 Lumens

Light Degree

6° 60°



POWERSUPPLY

Driver

CHIP



COLOR TEMPERATURE

3000K / 4000K / 5000K / 6500K

COLOR RENDERING INDEX

80Ra 90Ra

INSTALLATION

Recessed 1950

STANDARDS & COMPLIANCES















DIMENSIONS (mm)



Illuminance Flow




Product Features:

Adopt the super mini design, high quality LED chips, efficient optical technology, anti-dazzle design, excellent thermal management and a variety of color temperature, dedicated to the pavilion, the museum exhibition space, such as display ark, clothes closet and other places, have the effect of accent lighting.


AJC2DP



DIMENSIONS (mm)



Illuminance Flow





DIMENSIONS (MM)

Wattages- 1.5 Watt Lumens- 200 Lumens

Light Degree

25°



POWERSUPPLY

Driver

CHIP



COLOR TEMPERATURE

3000K / 4000K / 5000K / 6500K

COLOR RENDERING INDEX

80Ra 90Ra

INSTALLATION

Recessed 1100

STANDARDS & COMPLIANCES





Product Features:

Mini conceal spot light, aluminum precision machining molding, surface electrostatic spraying process.

The integrated heat dissipation structure enables LED chip to dissipate heat rapidly, ensuring the average life of the light source can reach 50,000 hours. Can be divided to increase or decrease the number of lamp, choose the light color to meet different application environment, HQ LED cold light source, no radiation, no strobe, for the spectrum does not contain red, ultraviolet light, protect the subject.

AJC360







Wattages - 1 Watt

Lumens - 150Lumens

Light Degree

15°



POWERSUPPLY

Driver

CHIP



COLOR TEMPERATURE

3000K / 4000K / 5000K / 6500K

COLOR RENDERING INDEX

80Ra

90Ra

INSTALLATION

Recessed

700

STANDARDS & COMPLIANCES
















DIMENSIONS (mm)



Product Features:


Mini body with power led, high brightness and durable quality.

Anodized silver & black shell finish ant-rust, antioxidant. The light can be adjusted.

AJC2LQ



DIMENSIONS (mm)

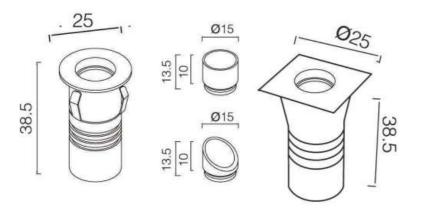



DIMENSIONS (MM)

Wattages - 2 Watt Lumens - 15Lumens

Light Degree

90°



POWERSUPPLY

Driver

CHIP



COLOR TEMPERATURE

3000K / 4000K / 5000K / 6500K

COLOR RENDERING INDEX

80Ra 90Ra

INSTALLATION

Recessed 1000

STANDARDS & COMPLIANCES











Product Features:


Mini conceal spot light, aluminum precision machining molding, surface electrostatic spraying process.

The integrated heat dissipation structure enables LED chip to dissipate heat rapidly, ensuring the average life of the light source can reach 50,000 hours. Can be divided to increase or decrease the number of lamp, choose the light color to meet different application environment, HQ LED cold light source, no radiation, no strobe, for the spectrum does not contain red, ultraviolet light, protect the subject.


AJC2LQ



DIMENSIONS (mm)

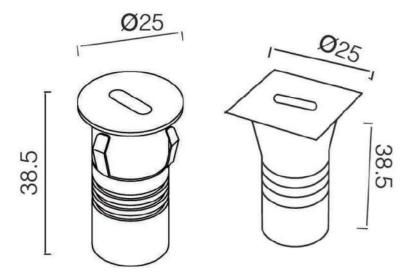

Illuminance Flow





DIMENSIONS (MM)

Wattages - 1.5 Watt Lumens - 150 Lumens

Light Degree



POWERSUPPLY

Driver

CHIP



COLOR TEMPERATURE

3000K / 4000K / 5000K / 6500K

COLOR RENDERING INDEX

80Ra 90Ra

INSTALLATION

Recessed 1000

STANDARDS & COMPLIANCES











Product Features:

Mini conceal spot light, aluminum precision machining molding, surface electrostatic spraying process.


The integrated heat dissipation structure enables LED chip to dissipate heat rapidly, ensuring the average life of the light source can reach 50,000 hours. Can be divided to increase or decrease the number of lamp, choose the light color to meet different application environment, HQ LED cold light source, no radiation, no strobe, for the spectrum does not contain red, ultraviolet light, protect the subject.

AJC2HQ




35

DIMENSIONS (mm)



Illuminance Flow





DIMENSIONS (MM)

Wattages - 3 Watt Lumens - 120 Lumens

Light Degree

90°



POWERSUPPLY

Driver

CHIP



COLOR TEMPERATURE

3000K / 4000K / 5000K / 6500K

COLOR RENDERING INDEX

80Ra 90Ra

INSTALLATION

Recessed 1000

STANDARDS & COMPLIANCES











Product Features:


Mini conceal spot light, aluminum precision machining molding, surface electrostatic spraying process.

The integrated heat dissipation structure enables LED chip to dissipate heat rapidly, ensuring the average life of the light source can reach 50,000 hours. Can be divided to increase or decrease the number of lamp, choose the light color to meet different application environment, HQ LED cold light source, no radiation, no strobe, for the spectrum does not contain red, ultraviolet light, protect the subject.

AJC2LQ



DIMENSIONS (mm)

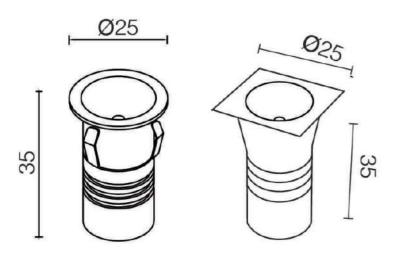



DIMENSIONS (MM)

Wattages - 2 Watt Lumens - 120 Lumens

Light Degree

90°



POWERSUPPLY

Driver

CHIP



COLOR TEMPERATURE

3000K / 4000K / 5000K / 6500K

COLOR RENDERING INDEX

80Ra 90Ra

INSTALLATION

Recessed 1000

STANDARDS & COMPLIANCES













Product Features:

Mini conceal spot light, aluminum precision machining molding, surface electrostatic spraying process.

The integrated heat dissipation structure enables LED chip to dissipate heat rapidly, ensuring the average life of the light source can reach 50,000 hours. Can be divided to increase or decrease the number of lamp, choose the light color to meet different application environment, HQ LED cold light source, no radiation, no strobe, for the spectrum does not contain red, ultraviolet light, protect the subject.

AJC2M



Lumens - 250 Lumens

Light Degree



CHIP



COLOR TEMPERATURE

3000K / 4000K / 5000K / 6500K

COLOR RENDERING INDEX

80Ra

90Ra

INSTALLATION

Recessed 600

STANDARDS & COMPLIANCES













Product Features:


Mini body with power led, high brightness and durable quality.

Anodized silver & black shell finish ant-rust, antioxidant. The light can be adjusted.


For show window, jewelry counter, display counter show room, museum.



DIMENSIONS (mm)

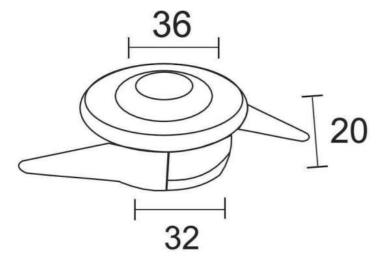

Illuminance Flow



Wattages - 2 Watt

POWERSUPPLY


Driver








DIMENSIONS (mm)



Illuminance Flow



DIMENSIONS (MM)

Wattages - 3 Watt Lumens - 250 Lumens

Light Degree

15° / 30° / 25°



POWERSUPPLY

Driver

CHIP



COLOR TEMPERATURE

3000K / 4000K / 5000K / 6500K

COLOR RENDERING INDEX

80Ra 90Ra

INSTALLATION

Recessed 1100

STANDARDS & COMPLIANCES





Product Features:

Mini body with power led, high brightness and durable quality.

Anodized silver & black shell finish ant-rust, antioxidant. The light can be adjusted.

AJC2M







Wattages - 3 Watt

Lumens - 280 Lumens

Light Degree

15° / 30° / 25°



POWERSUPPLY

Driver

CHIP



COLOR TEMPERATURE

3000K / 4000K / 5000K / 6500K

COLOR RENDERING INDEX

80Ra

90Ra

INSTALLATION

Recessed

STANDARDS & COMPLIANCES















DIMENSIONS (mm)

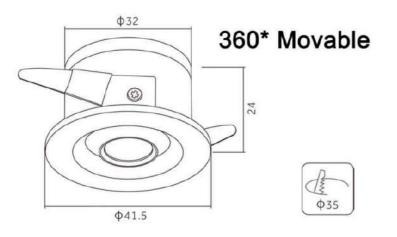

Illuminance Flow



Product Features:

Mini body with power led, high brightness and durable quality.


Anodized silver & black shell finish ant-rust, antioxidant. The light can be adjusted.

AJT41DZ




DIMENSIONS (mm)

10W 20W 30W



Illuminance Flow



DIMENSIONS (MM)

Wattages- 10 Watt, 20W 30w Lumens - 1800 Lumens

Light Degree

30° / 60°



POWERSUPPLY

240v

CHIP



COLOR TEMPERATURE

3000K / 4000K / 6500K

COLOR RENDERING INDEX

80Ra 90Ra

INSTALLATION

Insert to the track

12W-3400

20W **-**4000

30W -5500

BODY COLOR:

STANDARDS & COMPLIANCES













Product Features:

Zoom spotlight for use in track lighting systems. The unique zoom patent makes it possible to vary the beam angel between 15-and 60 degrees making this model highly versatile, The Zoom spot is available in 2700 to 6000 Kelvin and is made from robust die-cast aluminum. Choose between on/off, phase cut and DALI dimming.

They are able to be used in plenty of applications such as retail stores, art galleries, residential areas, schools, museum, offices, hospitality and healthcare, etc.

One of unique advantage for such best rated Smarter track lighting lies in its flexible installations covening track-mounted.

AJT41DZ







Light Degree

20° / 60°



POWERSUPPLY

240v

CHIP



COLOR TEMPERATURE

3000K / 4000K / 5000K / 6500K

COLOR RENDERING INDEX

80Ra 90Ra

INSTALLATION

Insert to the track 2800

BODY COLOR:

STANDARDS & COMPLIANCES













DIMENSIONS (mm)

10W 20W 30W



Illuminance Flow



Product Features:

Zoom spotlight for use in track lighting systems. The unique zoom patent makes it possible to vary the beam angel between 15-and 60 degrees making this model highly versatile, The Zoom spot is available in 2700 to 6000 Kelvin and is made from robust die-cast aluminum. Choose between on/off, phase cut and DALI dimming.

They are able to be used in plenty of applications such as retail stores, art galleries, residential areas, schools, museum, offices, hospitality and healthcare, etc.

One of unique advantage for such best rated Smarter track lighting lies in its flexible installations covening track-mounted.

AJT10FC





DIMENSIONS (MM)

Wattages-10 Watt, 20 Watt, 30 Watt Lumens - 100 Lumens

Light Degree

30°



POWERSUPPLY

240v

CHIP



COLOR TEMPERATURE

3000K / 4000K / 6500K

COLOR RENDERING INDEX

80Ra 90Ra

INSTALLATION

10W-11000 20W - 12000

30W -18000

BODY COLOR:

STANDARDS & COMPLIANCES











DIMENSIONS (mm)



Illuminance Flow



Product Features:

Zoom spotlight for use in track lighting systems. The unique zoom patent makes it possible to vary the beam angel between 15-and 60 degrees making this model highly versatile, The Zoom spot is available in 2700 to 6000 Kelvin and is made from robust die-cast aluminum. Choose between on/off, phase cut and DALI dimming.

They are able to be used in plenty of applications such as retail stores, art galleries, residential areas, schools, museum, offices, hospitality and healthcare, etc.

One of unique advantage for such best rated Smarter track lighting lies in its flexible installations covening track-mounted.